

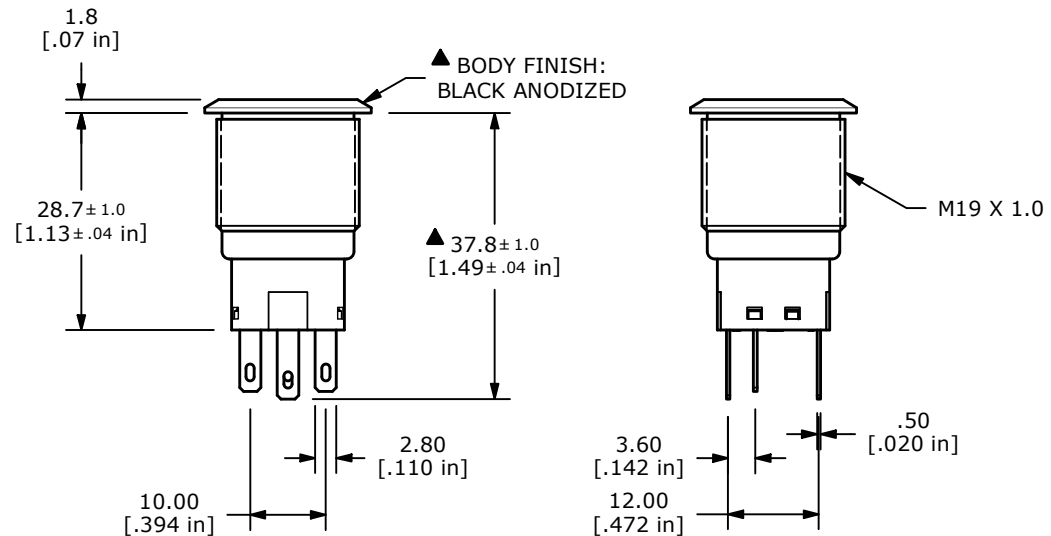
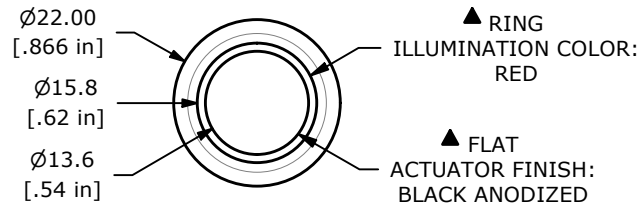


RECOMMENDED PANEL CUTOUT  
MAX. PANEL THICKNESS  
11.0 [.43 in]

| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| ON              | ON     |
| 1-3             | 1-2    |



## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 M $\Omega$  MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50m $\Omega$  MAX. @ 1A 12VDC
10. OPERATING TEMP.: -40°C TO 85°C
11. TRAVEL: 2.8 [.11 in]
12. ▲ DENOTES CRITICAL PARAMETER
13. INGRESS PROTECTION: IP67
- ▲ 14. HARDWARE SUPPLIED: O-RING AND HEXNUT
- ▲ 15. ILLUMINATION VOLTAGE: 6V

| REV | ECO NO     | DESCRIPTION       | DATE     | BY | E-SWITCH®           |               |       |                     | OBJECT ID |
|-----|------------|-------------------|----------|----|---------------------|---------------|-------|---------------------|-----------|
| B   | ECO-103865 | PV4 SERIES UPDATE | 01/14/26 | MR | TITLE PV4F23011-313 |               |       |                     | 000002535 |
|     |            |                   |          |    | SCALE 1:1           | DATE 3/7/2017 | DR JS | DWG 52-PV4F23011313 | REV B     |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED