

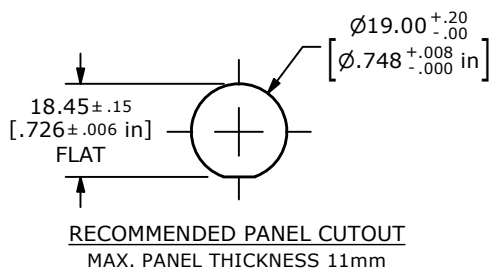


SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1- (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

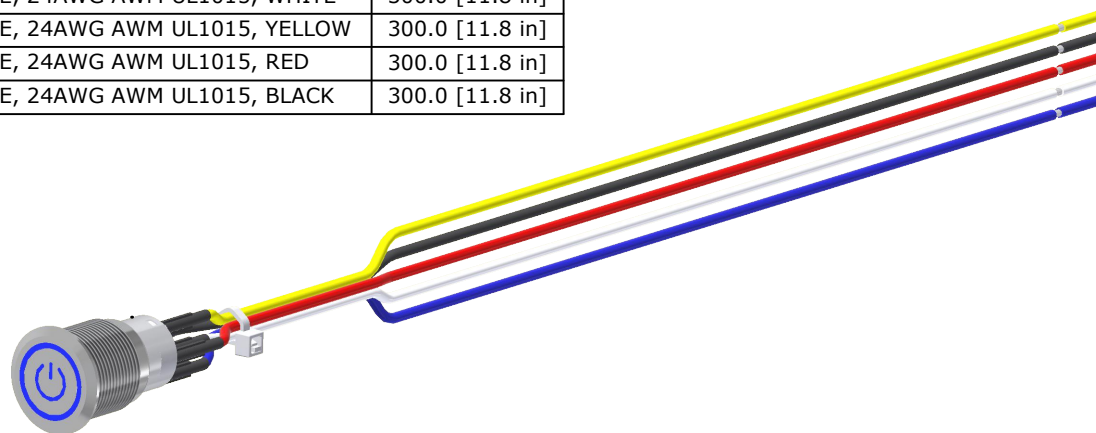

- NOTES:
- DIMENSIONS IN MM [INCH]
  - TERMINAL NUMBERS FOR REF. ONLY
  - ▲ CONTACT MATERIAL: GOLD
  - RATING: 2A 24VDC
  - ▲ LAMP VOLTAGE: 20mA 125V
  - INGRESS PROTECTION: IP65
  - TRAVEL: 2.8mm
  - OPERATING TEMP.: -20°C to 55°C
  - INSULATION RESISTANCE: 1,000 MΩ MIN.
  - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
  - DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
  - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
  - ▲ DENOTES CRITICAL PARAMETER.
  - ALL MATERIAL SHALL BE ROHS COMPLIANT
  - SUPPLIED HARDWARE: O-RING AND HEXNUT
  - ▲ 16. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

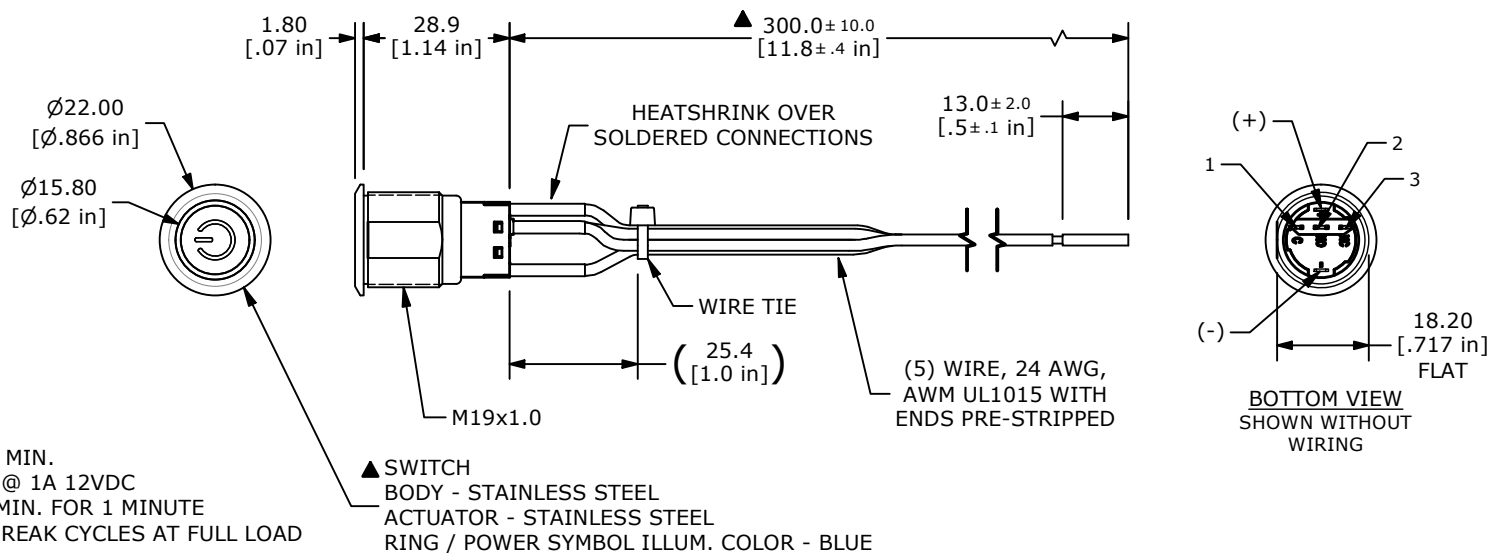

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-103300	RELEASE	03/19/25	JS



OBJECT ID  
100129885

TITLE PV4FWB0SSG-346-M26				
SCALE 2:3	DATE 3/13/2025	DR JS	DWG 52-PV4FWB0SSG346M26	REV A