





SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-4	WIRE, 24AWG AWM UL1015, PURPLE	300.0 [11.8 in]
SW1-5	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-6	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1- (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

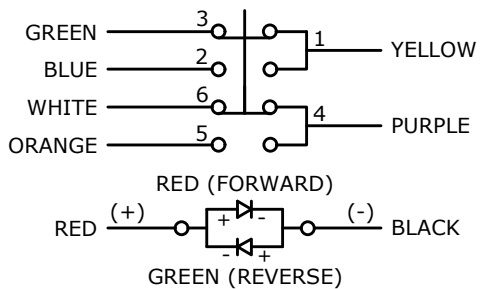

SCHEMATIC
ON - (ON) - DPDT ILLUMINATED
() DENOTES MOMENTARY FUNCTION



RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 11.0mm

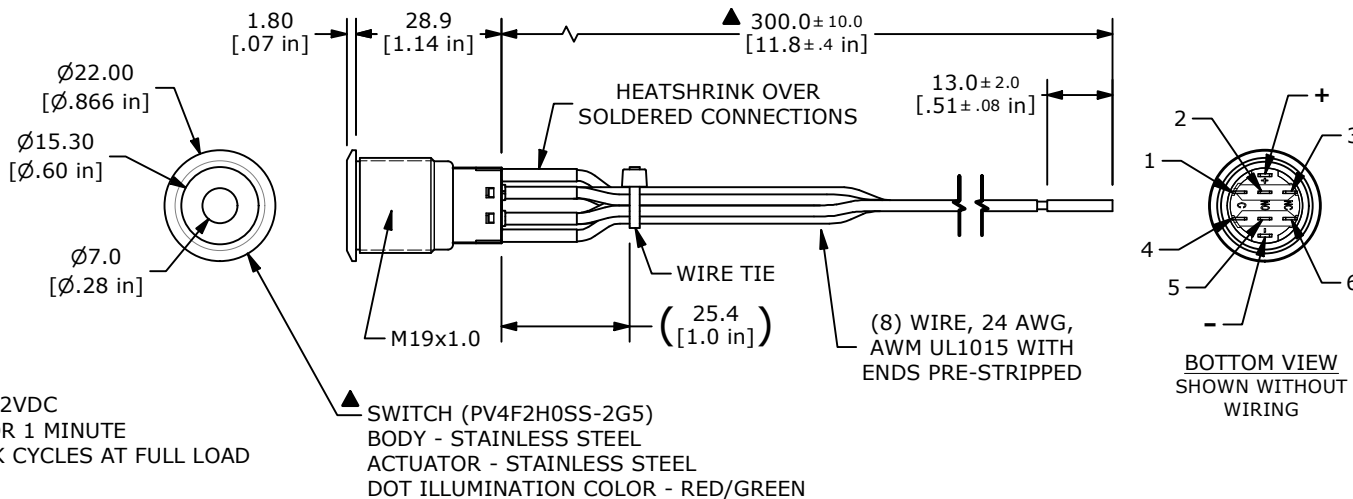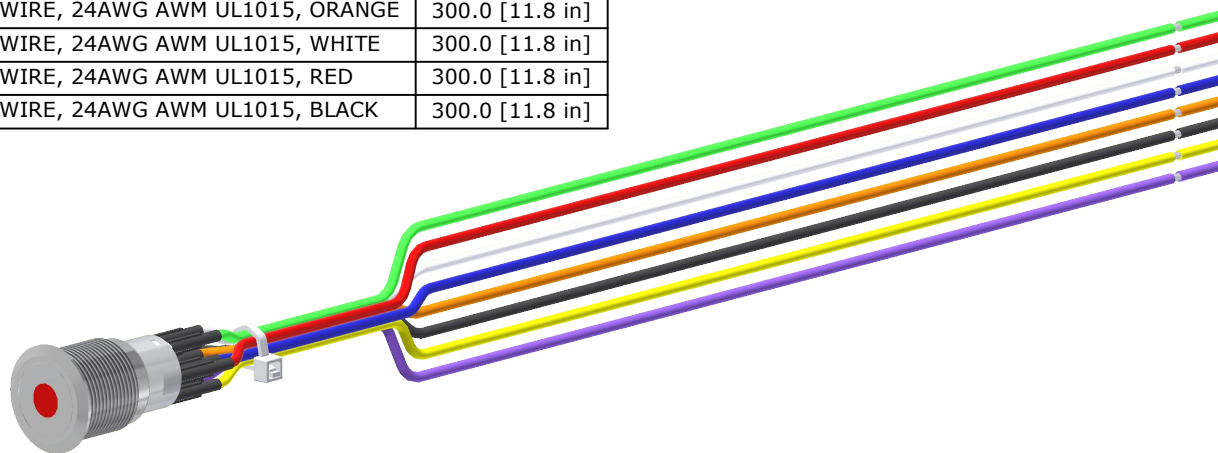

- NOTES:
- DIMENSIONS IN MM [INCH]
 - TERMINAL NUMBERS FOR REF. ONLY
 - ▲ CONTACT MATERIAL: SILVER
 - RATING: 2A 24VDC
 - ▲ LAMP VOLTAGE: 24V
 - INGRESS PROTECTION: IP65
 - TRAVEL: 2.8mm
 - OPERATING TEMP.: -20°C to 55°C
 - INSULATION RESISTANCE: 1,000MΩ MIN.
 - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 - DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 - ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
 - ▲ DENOTES CRITICAL PARAMETER.
 - ALL MATERIAL SHALL BE ROHS COMPLIANT
 - ▲ SUPPLIED HARDWARE: O-RING AND HEXNUT
 - USE P/N's DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-103121	Release	12/12/24	MW



OBJECT ID
100129090

TITLE PV4FWH0SS-2G5		SCALE 2:3	DATE 12/11/2024	DR MW	DWG 52-PV4FWH0SS2G5	REV A
------------------------	--	--------------	--------------------	----------	------------------------	----------