


SCHEMATIC

ON - (ON) - DPDT ILLUMINATED
 () DENOTES MOMENTARY FUNCTION




SWITCH	WIRE
SW1-1	WIRE, 24AWG AWM UL1015, BLUE
SW1-2	WIRE, 24AWG AWM UL1015, WHITE
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW
SW1- (+)	WIRE, 24AWG AWM UL1015, RED
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK



RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 11.0 [.43 in]

NOTES:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. ALL MATERIAL SHALL BE ROHS COMPLIANT
4. TERMINAL NUMBERS FOR REF. ONLY
5. CONTACT MATERIAL: SILVER
6. RATING: 2A 24VDC
- ▲ 7. LAMP VOLTAGE: 24V
8. INGRESS PROTECTION: IP67
9. TRAVEL: 2.8 [.11 in]
10. OPERATING TEMP.: -20°C TO 85°C
11. INSULATION RESISTANCE: 1,000 MΩ MIN.
12. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
13. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
14. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
15. ▲ DENOTES CRITICAL PARAMETER.
16. SUPPLIED HARDWARE: O-RING AND HEXNUT
- ▲ 17. USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

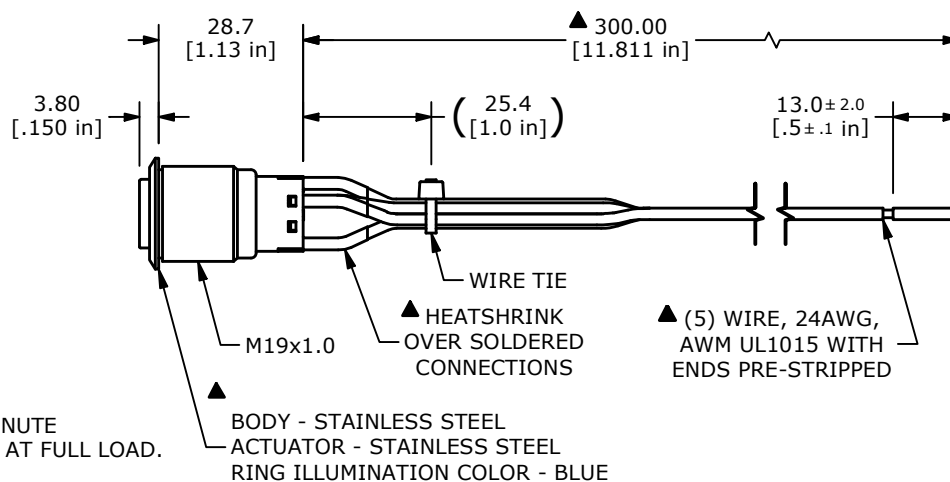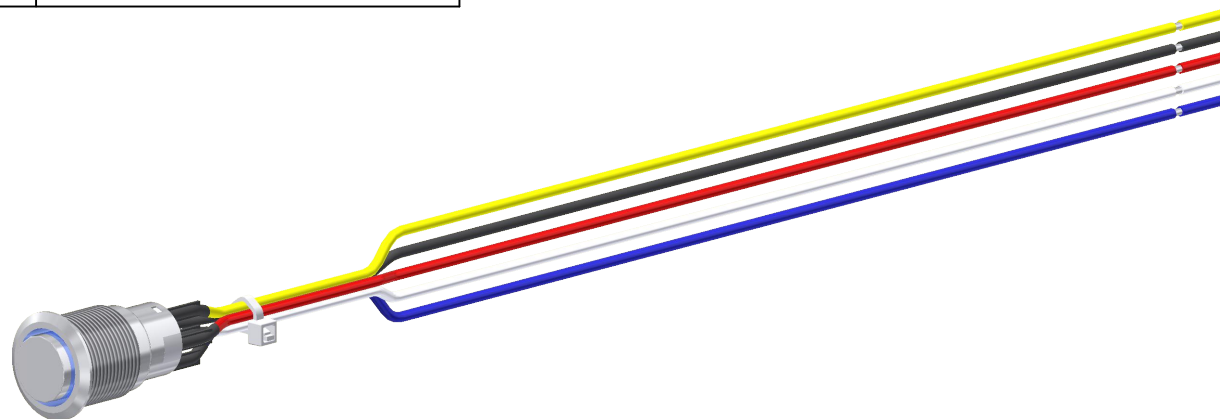

BOTTOM VIEW
 SHOWN WITHOUT WIRING

REV	ECO NO	DESCRIPTION	DATE	BY	OBJECT ID
B	ECO-103812	PV4 SERIES UPDATE	01/14/26	MR	100122988
TITLE					PV4HWB0SS-345
SCALE		DATE	DR	DWG	REV
2:3		11/2/2022	JS	52-PV4HWB0SS345	B