



PANEL MOUNTING
MAX. PANEL THICKNESS 4mm

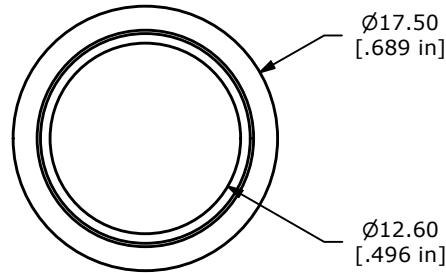

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY





▲ CIRCUIT: SPST

▲ DOMED
ACTUATOR COLOR:
STAINLESS STEEL


▲ BODY COLOR:
STAINLESS STEEL

M12x1.0
THREAD

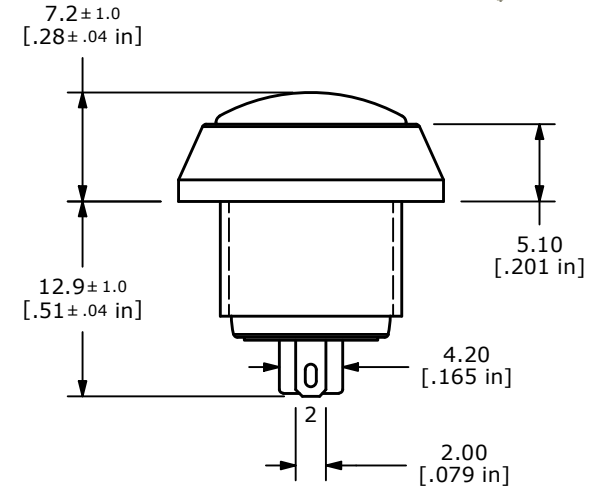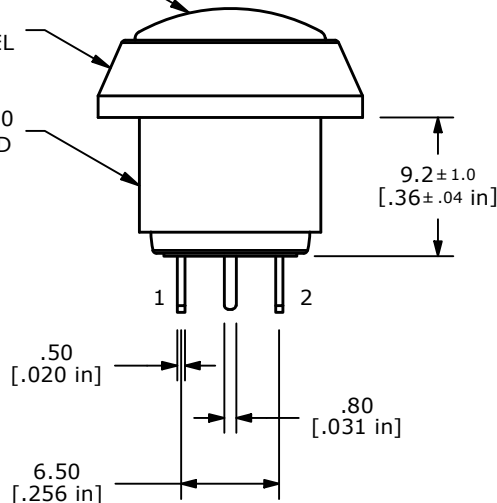

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 2A @ 36 VDC
- ELECTRICAL LIFE: 200,000 CYCLES
- CONTACT RESISTANCE: 50 mΩ MAX. @ 1A 12VDC (INITIAL)
- INSULATION RESISTANCE: 1,000 MΩ MIN. @ 500VDC.
- DIELECTRIC STRENGTH: 2,000 VAC rms.
- OPERATING TEMPERATURE: -20°C TO +70°C.
- PANEL THICKNESS MAX: 4.0 mm.
- INGRESS PROTECTION: IP65
- ▲ DENOTES CRITICAL PARAMETER.
- HARDWARE INCLUDED, 1 O-RING & 1 HEX NUT.(NOT SHOWN)



E-SWITCH®

OBJECT ID
000002806

B	22670	UPDATED ACTUATOR	1/9/17	MJR
A	21254	RELEASE FOR PRODUCTION	10/11/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV5S240SS

SCALE
2:1

DATE
10/11/2013

DR
EBP

DWG
52-PV5S240SS

REV
B