






SWITCH	WIRE
SW1-1	WIRE, 28 AWG STRANDED AWM UL1061, RED
SW1-2	WIRE, 28 AWG STRANDED AWM UL1061, BLACK



SCHEMATIC
 OFF - (ON) - SPST NON-ILLUMINATED
 () DENOTES MOMENTARY FUNCTION

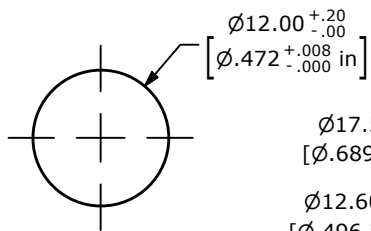


RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 4.0 [0.16 in]

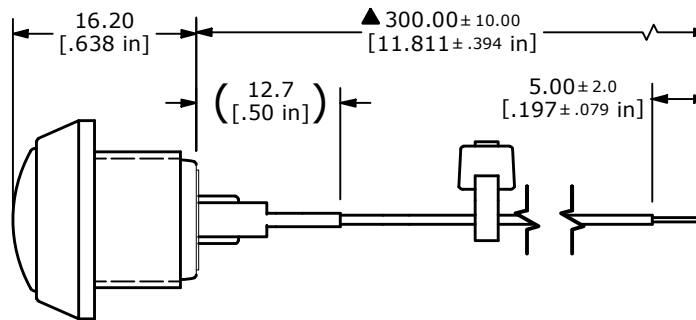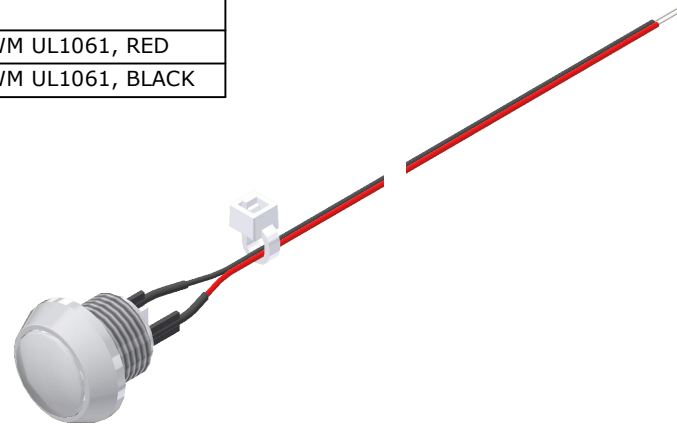

BOTTOM VIEW
 SHOWN WITHOUT
 WIRING AND
 CONNECTOR

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 2A @ 36VDC
5. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
6. INSULATION RESISTANCE: 1,000MΩ @ 500VDC
7. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
8. ELECTRICAL LIFE: 200,000 CYCLES
9. CONTACT MATERIAL: SILVER
10. OPERATING TEMPERATURE: -20°C to 70°C
11. INGRESS PROTECTION: IP65
- ▲ 12. LED VOLTAGE: N/A
- ▲ 13. HARDWARE INCLUDED: 1 O-RING & 1 HEX NUT (NOT SHOWN)
14. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 15. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

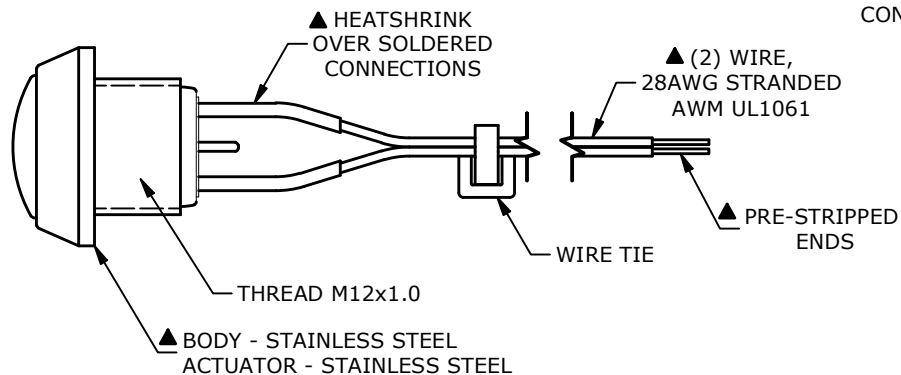

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-104090	RELEASE	05/06/26	JS



OBJECT ID
 100132634

TITLE PV5SW40SS				
SCALE 3:2	DATE 4/29/2026	DR JS	DWG 52-PV5SW40SS	REV A