



**RECOMMENDED PANEL CUTOUT**  
MAX. PANEL THICKNESS 10mm

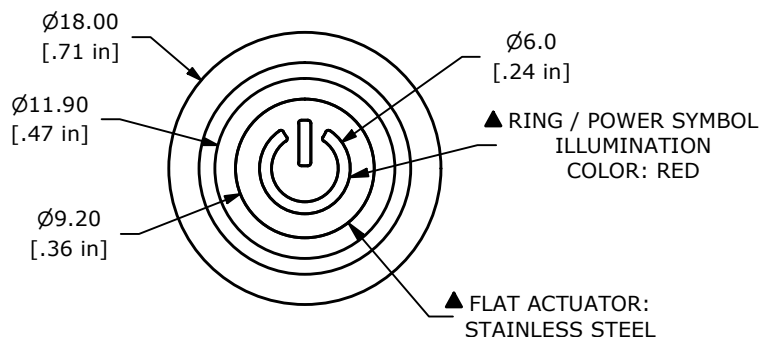


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

( ) = MOMENTARY



**NOTE:**

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER PLATED COPPER
- RATING: 2A 48VDC
- ELECTRICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- OPERATING TEMP.: -40°C to 85°C
- TRAVEL: 1.8mm
- ▲ DENOTES CRITICAL PARAMETER
- ILLUMINATION VOLTAGE: 2.8V 20mA
- INGRESS PROTECTION: IP65
- HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)

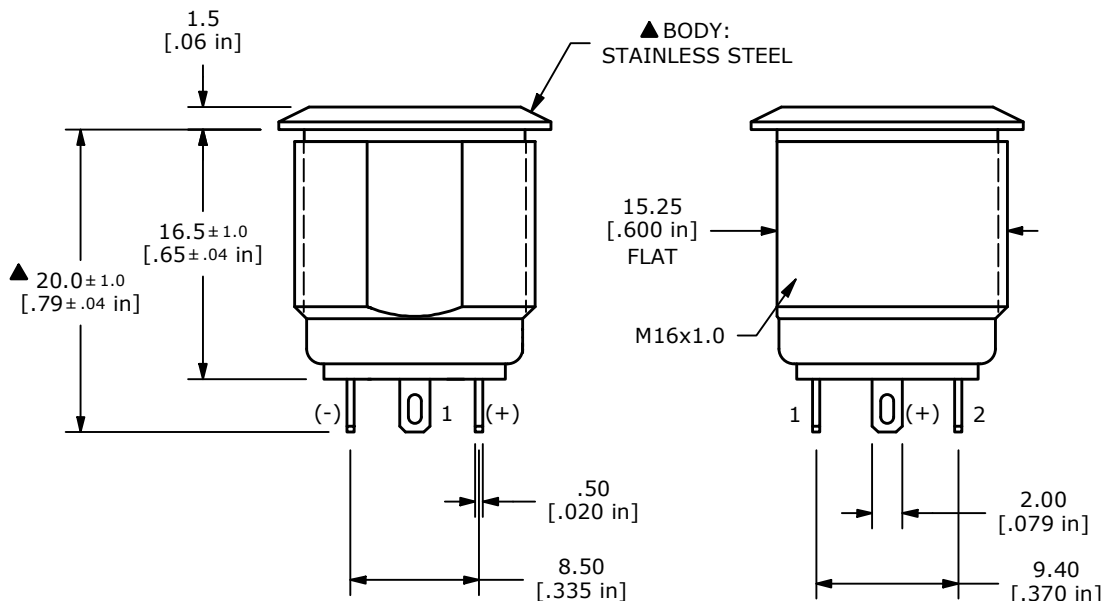

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-103439	PRINT UPDATE	06/23/25	JS



OBJECT ID  
100126193

TITLE PV6F240SS-311-M15				
SCALE 2:1	DATE 11/8/2023	DR JS	DWG 52-PV6F240SS311M15	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED