


RECOMMENDED PANEL CUTOUT  
MAX. PANEL THICKNESS 10mm

▲ SWITCH FUNCTION




POS. 1	POS. 2
OFF	(ON)
OPEN	1-2


(ON) = MOMENTARY



## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 2A 48VDC
- ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- OPERATING TEMP.: -20°C to 55°C
- TRAVEL: 1.8mm
- ▲ DENOTES CRITICAL PARAMETER.
- ILLUMINATION VOLTAGE: 2.8V 20mA
- ILLUMINATION COLOR: GREEN
- HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)

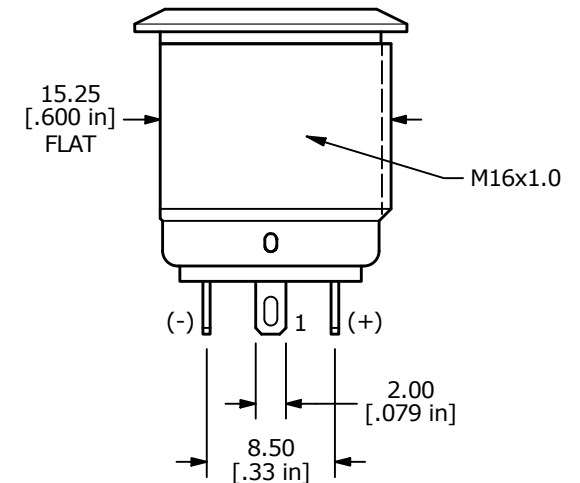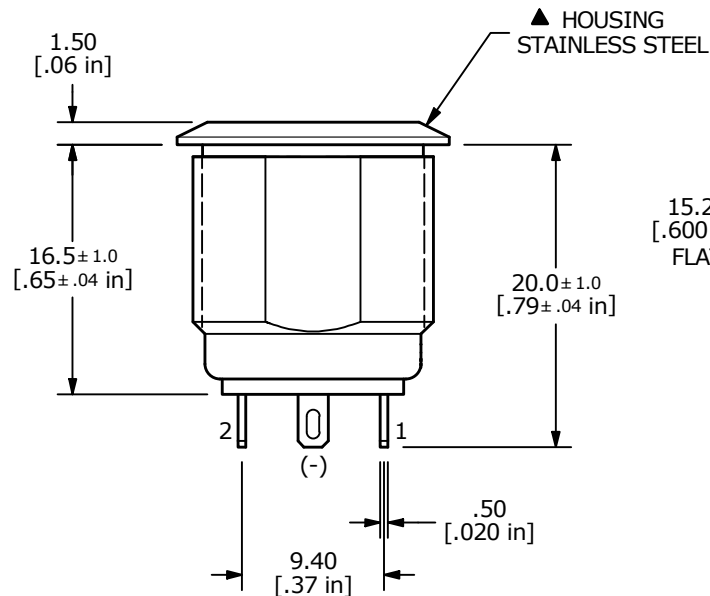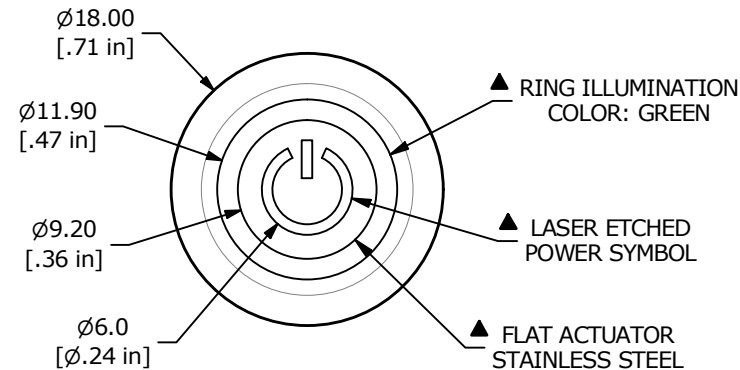

REV	ECO NO	DESCRIPTION	DATE	BY					OBJECT ID
A	ECO-100571	Release	11/24/21	MW	TITLE PV6F240SS-331-M01				100120088
					SCALE	DATE	DR	DWG	REV
					2:1	11/23/2021	MW	52-PV6F240SS331M01	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED