


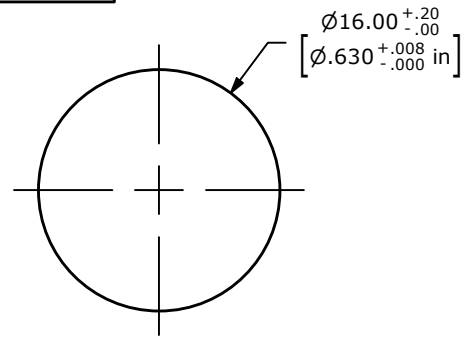
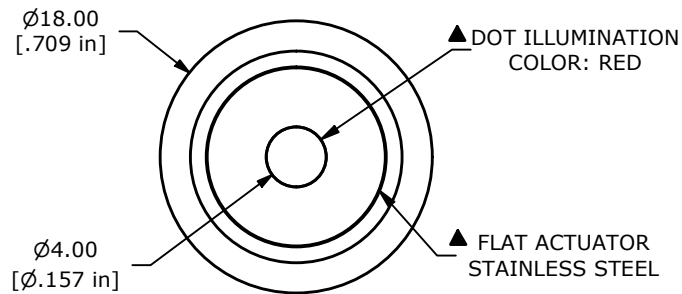


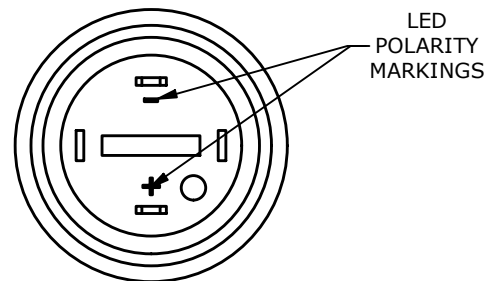

RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 10mm

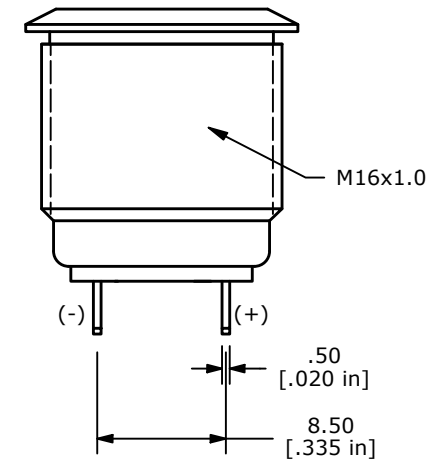

▲ - ○ ○ - +
LAMP INDICATOR
CONTACT CONFIGURATION

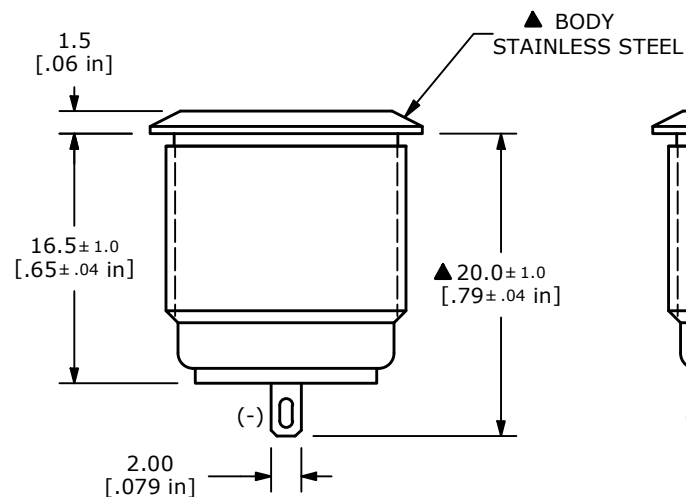

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. OPERATING TEMP.: -40°C to 85°C
4. ▲ DENOTES CRITICAL PARAMETER.
5. ILLUMINATION COLOR: RED
6. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
7. ILLUMINATION BASE RATING: 20mA 1.8V
8. INGRESS PROTECTION: IP65

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
D	ECO-103458	PRINT UPDATE	06/27/25	JS	TITLE PV6F2PXSS-211				000002892
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	8/21/2012	rc	52-PV6F2PXSS211	D