

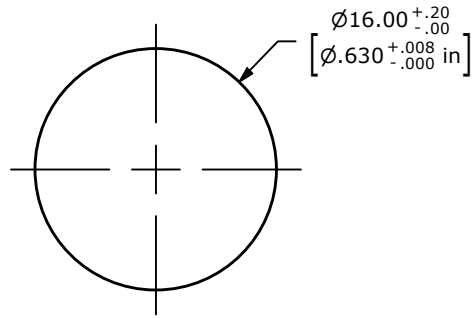
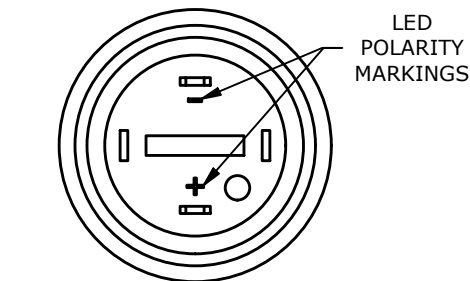
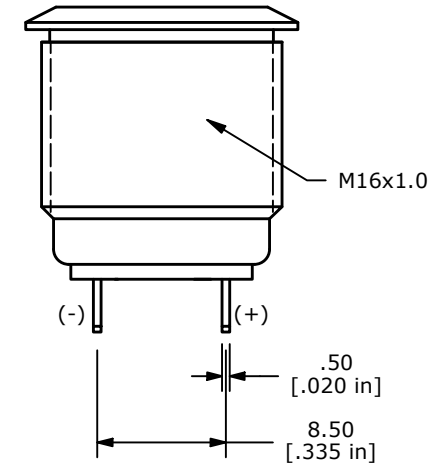


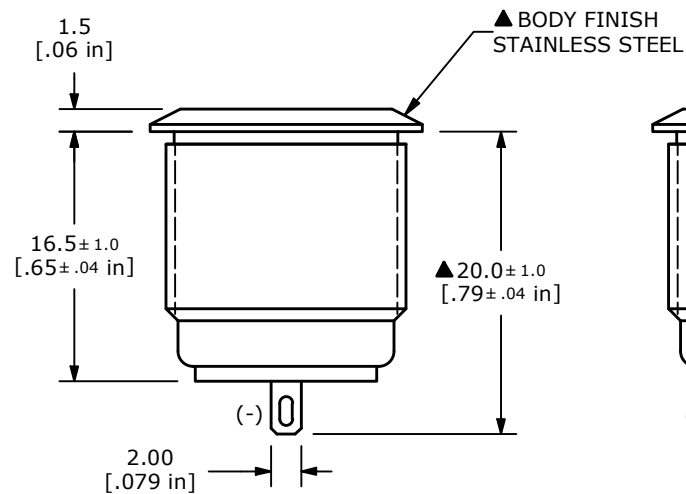

RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 10mm

- ○ - L - ○ - +
▲ LAMP INDICATOR
CONTACT CONFIGURATION

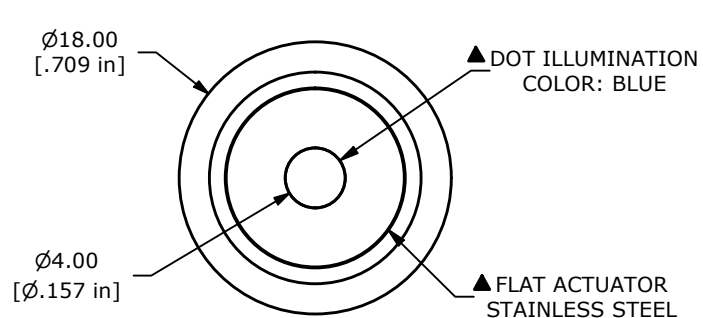

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. OPERATING TEMP.: -40°C to 85°C
 4. ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 5. ILLUMINATION COLOR: BLUE
 6. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
 - ▲ 7. ILLUMINATION BASE RATING: 20mA 2.8V
 8. INGRESS PROTECTION: IP65

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-103458	PRINT UPDATE	06/27/25	JS	TITLE PV6F2PXSS-241				000002894
					SCALE	DATE	DR	DWG	REV
					2:1	8/21/2012	rc	52-PV6F2PXSS241	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED