


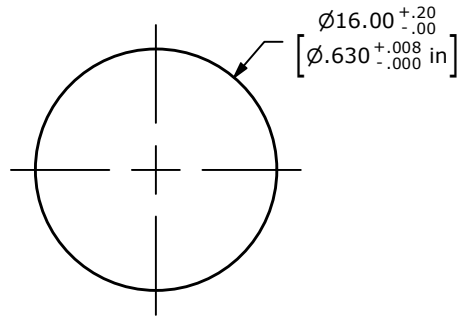
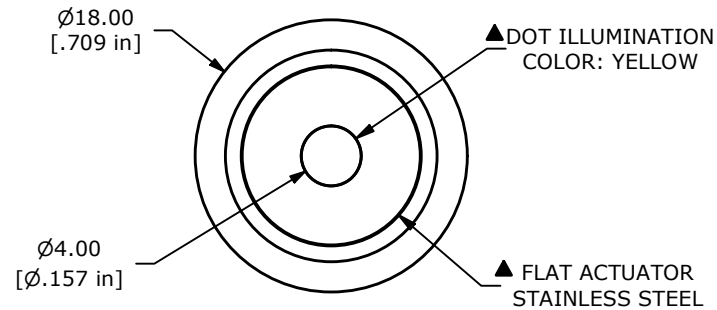


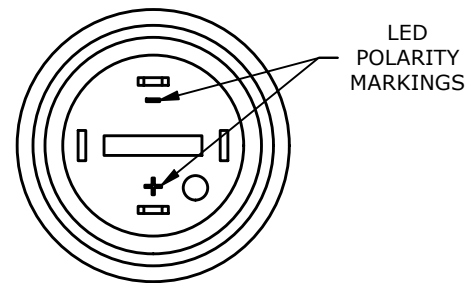

RECOMMENDED PANEL CUTOUT  
MAX PANEL THICKNESS 10mm

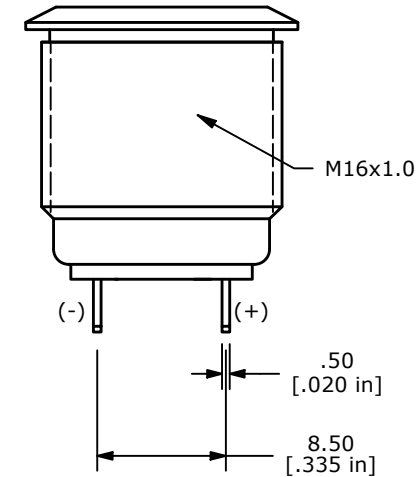

- ○ — ○ — ○ — +  
▲ LAMP INDICATOR  
CONTACT CONFIGURATION

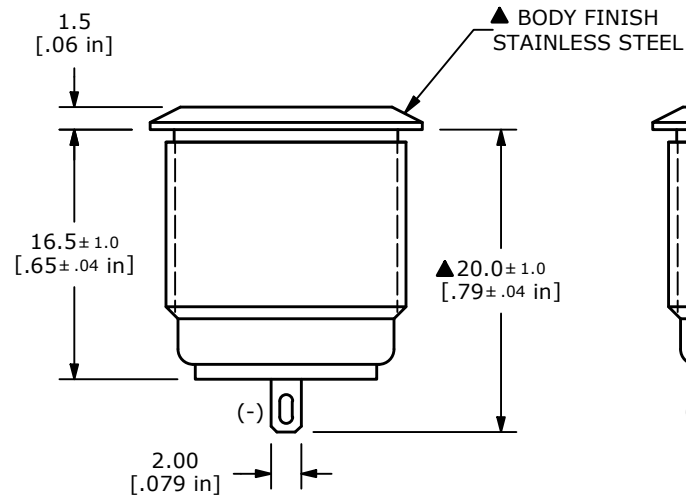

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. OPERATING TEMP.: -40°C to 85°C
4. ▲ DENOTES CRITICAL PARAMETER.
5. ILLUMINATION COLOR: YELLOW
6. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
- ▲ 7. ILLUMINATION BASE RATING: 20mA 1.8V
8. INGRESS PROTECTION: IP65

| REV                                                                                                          | ECO NO     | DESCRIPTION  | DATE     | BY | E-SWITCH®           |           |    |                 | OBJECT ID |
|--------------------------------------------------------------------------------------------------------------|------------|--------------|----------|----|---------------------|-----------|----|-----------------|-----------|
| D                                                                                                            | ECO-103458 | PRINT UPDATE | 06/27/25 | JS | TITLE PV6F2PXSS-251 |           |    |                 | 000002895 |
|                                                                                                              |            |              |          |    | SCALE               | DATE      | DR | DWG             | REV       |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |              |          |    | 2:1                 | 8/21/2012 | rc | 52-PV6F2PXSS251 | D         |