


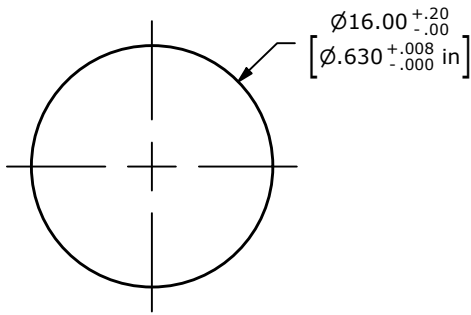

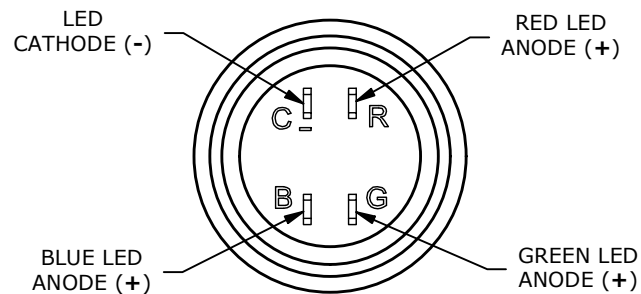


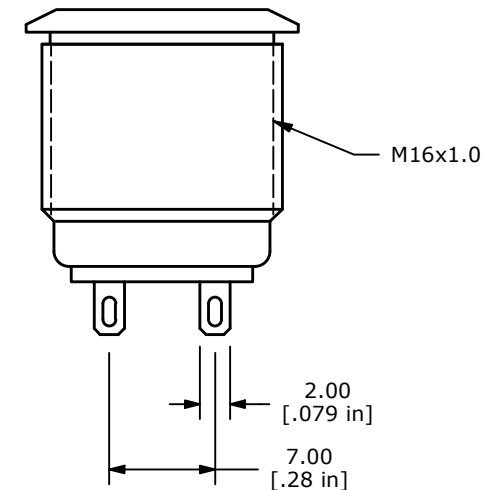

RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 10mm

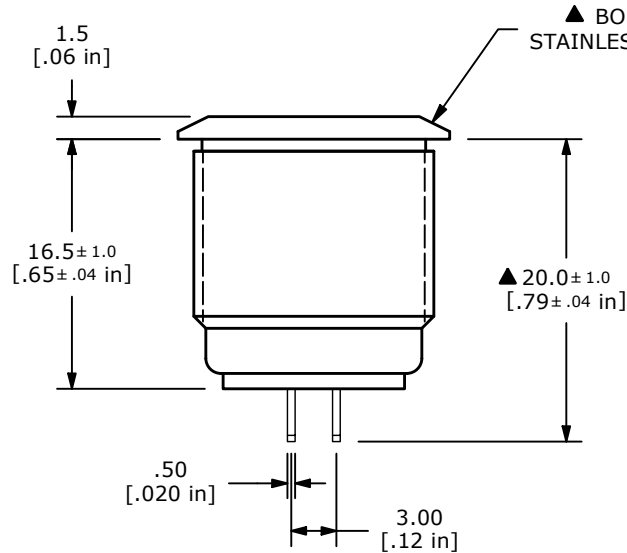

▲ LAMP INDICATOR
CONTACT CONFIGURATION

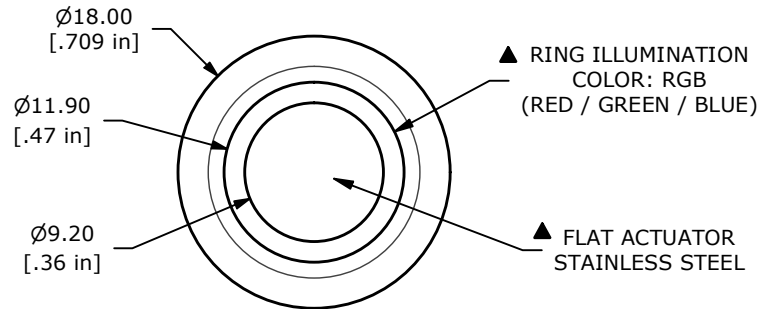

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. OPERATING TEMP.: -40°C to 85°C
4. ▲ DENOTES CRITICAL PARAMETER.
5. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
6. ILLUMINATION COLOR: RGB (RED / GREEN / BLUE)
7. ILLUMINATION BASE RATING @ 20mA:
RED - 1.8V
GREEN - 2.8V
BLUE - 2.8V
8. INGRESS PROTECTION: IP65

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103484	PRINT UPDATE	06/27/25	JS	TITLE PV6F2PXSS-3R1				000002900
					SCALE	DATE	DR	DWG	REV
					2:1	9/22/2017	rc	52-PV6F2PXSS3R1	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED