




RECOMMENDED
PANEL CUTOUT

MAX. PANEL THICKNESS 10mm



▲ LAMP INDICATOR
CONTACT CONFIGURATION

| SWITCH | WIRE | LENGTH |
|----------|-------------------------------|-----------------|
| SW1- (+) | WIRE, 22AWG AWM UL1007, RED | 300.0 [11.8 in] |
| SW1- (-) | WIRE, 22AWG AWM UL1007, BLACK | 300.0 [11.8 in] |

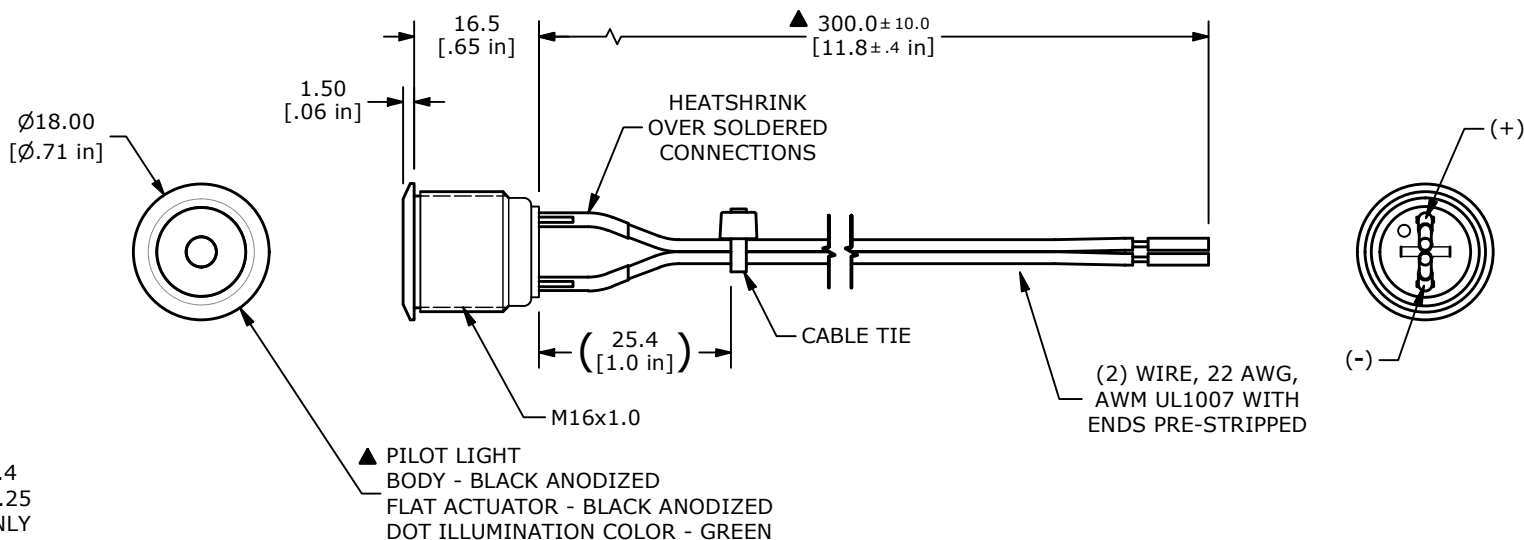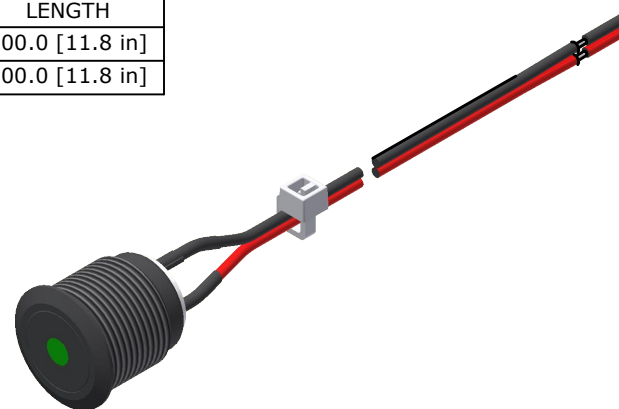

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 2A 48VDC
5. OPERATING TEMP.: -40°C to 85°C
6. ▲ DENOTES CRITICAL PARAMETER.
7. INGRESS PROTECTION: IP65
- ▲ 8. ILLUMINATION BASE RATING: 20mA 2.8V
- ▲ 9. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
10. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

| REV | ECO NO | DESCRIPTION | DATE | BY |
|-----|------------|--------------|----------|----|
| B | ECO-103517 | PRINT UPDATE | 07/14/25 | JS |



OBJECT ID
100129347

| | | | | | | |
|------------------------|--|--------------|------------------|----------|------------------------|----------|
| TITLE PV6FWPX11-231 | | SCALE 1:1 | DATE 1/9/2025 | DR JS | DWG 52-PV6FWPX11231 | REV B |
|------------------------|--|--------------|------------------|----------|------------------------|----------|