



RECOMMENDED PANEL CUTOUT
MAX PANEL THICKNESS 10mm

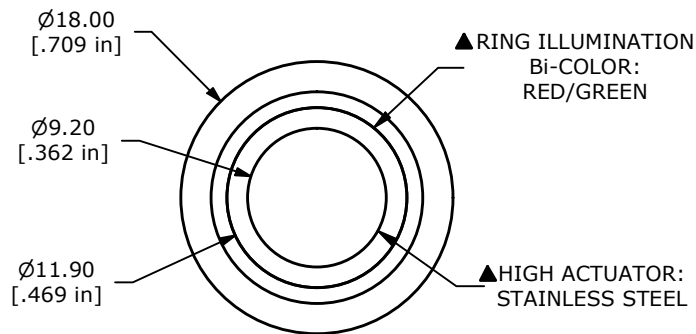



SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: GOLD
- RATING: 2A 48VDC
- ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000M Ω MIN.
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
- OPERATING TEMP.: -40°C to 85°C
- TRAVEL: 1.8mm
- ▲ DENOTES CRITICAL PARAMETER.
- ILLUMINATION VOLTAGE RATING: 1.8 v 20 mA FORWARD,
2.8 v 20 mA REVERSE
- INGRESS PROTECTION: IP65
- HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)

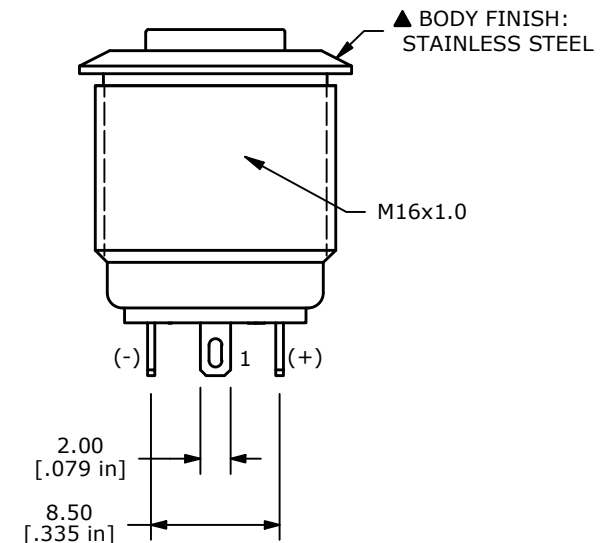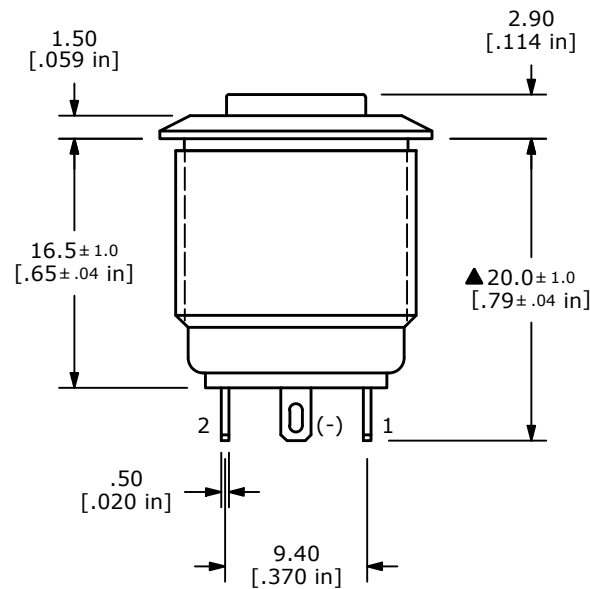

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID		
B	ECO-103500	PRINT UPDATE	07/14/25	JS						000002928		
					TITLE PV6H240SSG-3G1							
					SCALE 2:1		DATE 5/26/2015		DR MW	DWG 52-PV6H240SSG3G1		REV B
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED												

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED