


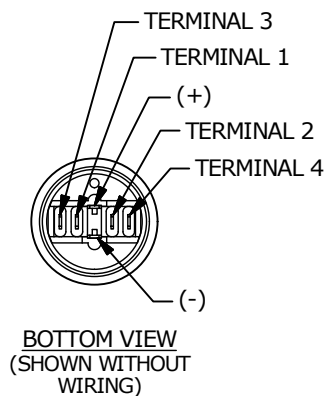


SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-4	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1- (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

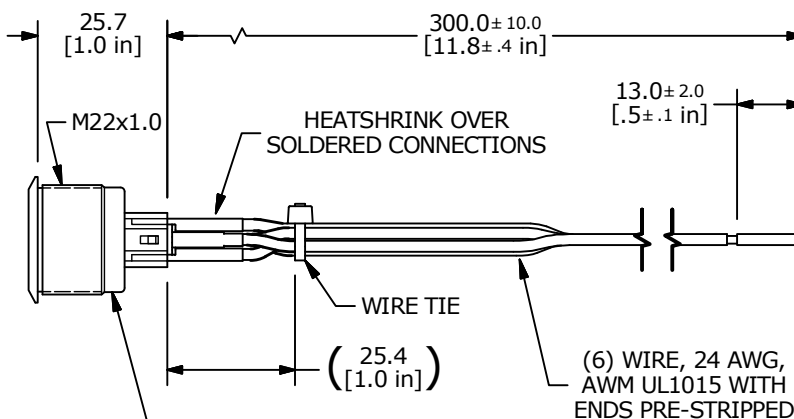

RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 8.0 [0.31 in]

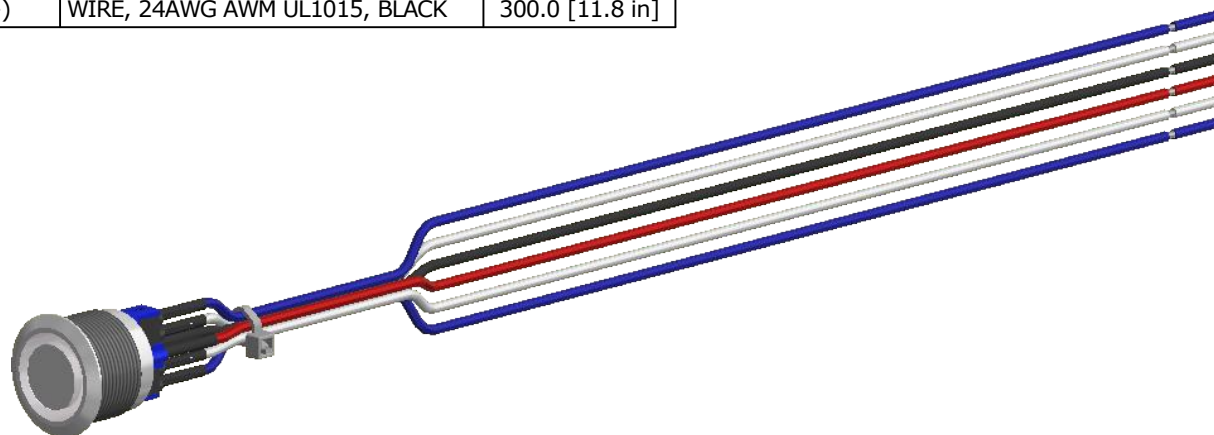

NOTES:

- DIMENSIONS IN MM [INCH]
- ALL MATERIAL SHALL BE ROHS COMPLIANT
- TERMINAL NUMBERS FOR REF. ONLY
- CONTACT MATERIAL: SILVER
- RATING: 2A 48VDC
- INGRESS PROTECTION: IP65
- TRAVEL: 2.2mm
- ACTUATION FORCE: 4N
- OPERATING TEMP.: -20°C to 55°C
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
- ELECTRIC LIFE: 50,000 CYCLES.
- ▲ DENOTES CRITICAL PARAMETER.
- ▲ ILLUMINATION COLOR: RED / GREEN
- ▲ LAMP VOLTAGE: 12V
- ▲ SUPPLIED HARDWARE: O-RING AND HEXNUT
- ▲ USE P/N's DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

SWITCH (52-PV7F2Y0SS3G4)
 BODY - STAINLESS STEEL
 ACTUATOR - STAINLESS STEEL
 RING ILLUMINATION COLOR - RED/GREEN



B	23995	UPDATED NOTES	8/13/19	MJR
A	23990	RELEASE	8/12/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV7FWY0SS-3G4				
SCALE 2:3	DATE 8/12/2019	DR MW	DWG 52-PV7FWY0SS3G4	REV B