


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 10mm






▲ SWITCH FUNCTION

POS. 1	POS. 2
1-2 ON 3-4 OFF	1-2 OFF 3-4 ON



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 2A @ 48VDC
- ▲ 5. ILLUMINATION VOLTAGE: 2.8V
6. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
7. INSULATION RESISTANCE: 1,000M Ω @ 500VDC
8. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
9. ELECTRICAL LIFE: 50,000 CYCLES
10. OPERATING TEMPERATURE: -20°C to 55°C
11. INGRESS PROTECTION: IP65
- ▲ 12. SUPPLIED HARDWARE: O-RING AND HEXNUT
13. ▲ DENOTES CRITICAL PARAMETER

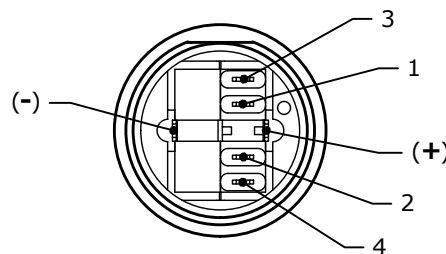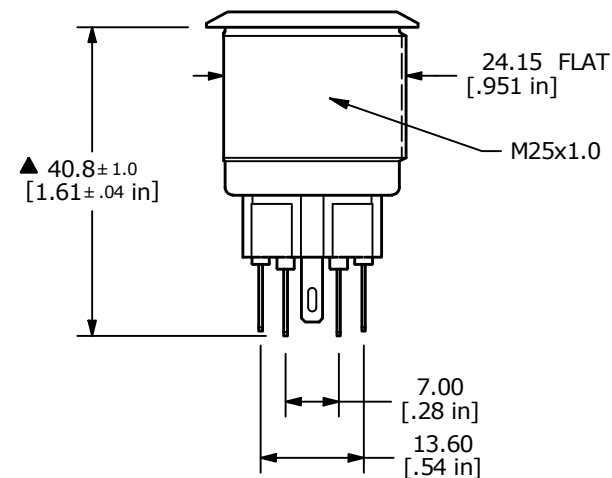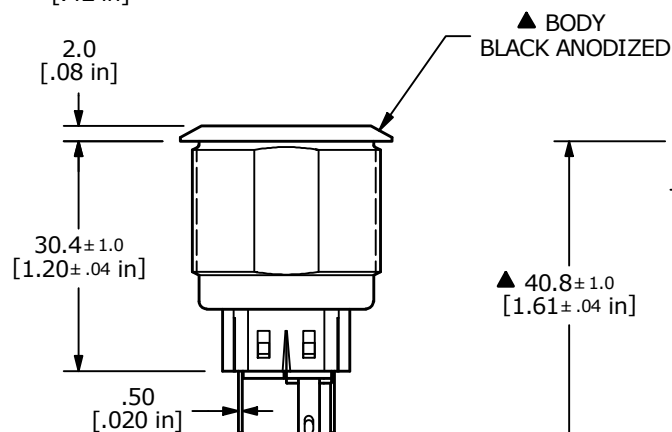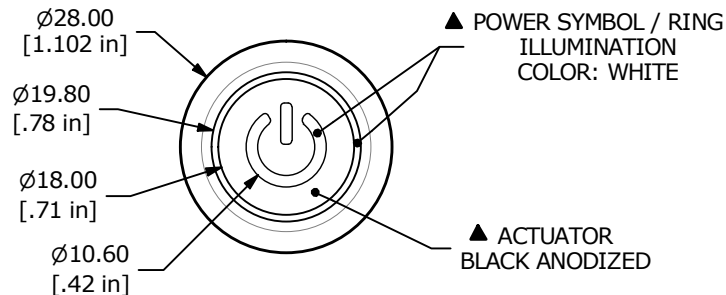

OBJECT ID
000003063

A	24423	RELEASE	7/30/20	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV8F2T011-301-M14

SCALE 1:1	DATE 7/30/2020	DR MW	DWG 52-PV8F2T011301M14	REV A
--------------	-------------------	----------	---------------------------	----------