



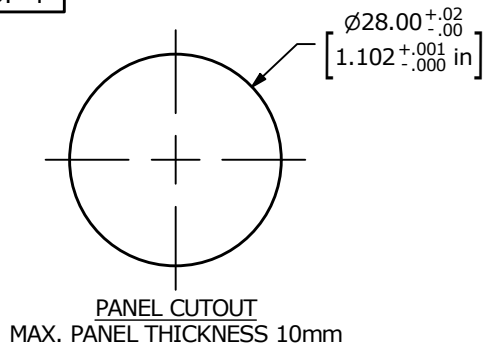





SWITCH FUNCTION	
POS. 1	POS. 2
1a-2a 1b-2b	3a-4a 3b-4b



▲ DPDT ON-OFF / OFF-ON
CONTACT CONFIGURATION

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF. ONLY
- RATING: 2A @ 48VDC
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- INSULATION RESISTANCE: 1,000MΩ @ 500VDC
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 50,000 CYCLES
- OPERATING TEMPERATURE: -20°C to 55°C
- INGRESS PROTECTION: IP66
- SUPPLIED HARDWARE: O-RING and HEXNUT
- ▲ DENOTES CRITICAL PARAMETER
- ILLUMINATION COLOR: RED (FORWARD), GREEN (REVERSE)
- ILLUMINATION VOLTAGE: 24VDC

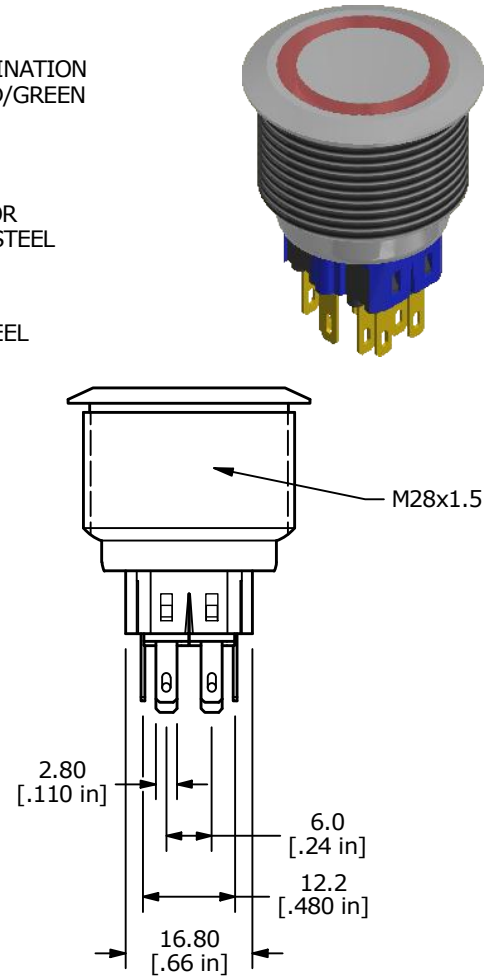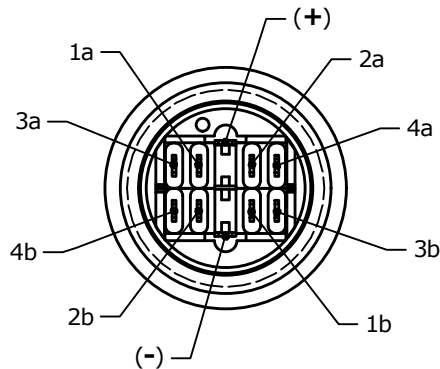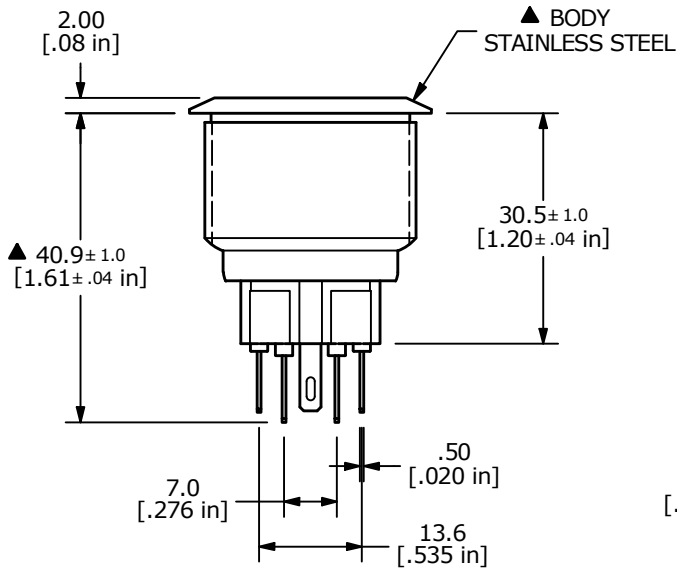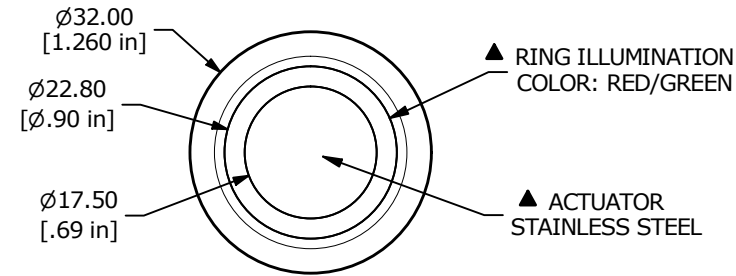

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-100823	update notes, print update	04/01/22	MW	TITLE PV9F2U0SS-3G5				000003182
					SCALE 1:1	DATE 11/12/2014	DR rc	DWG 52-PV9F2U0SS3G5	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED