

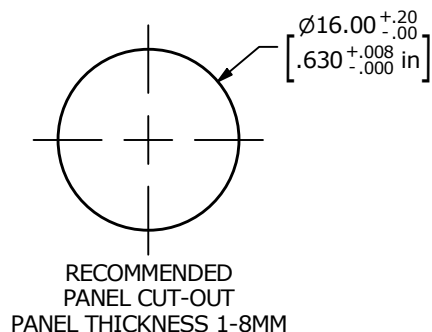

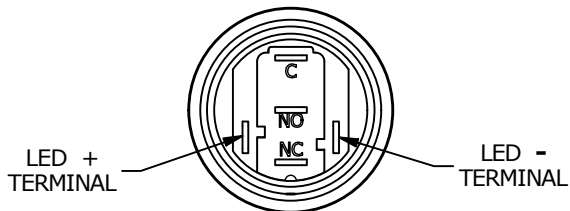
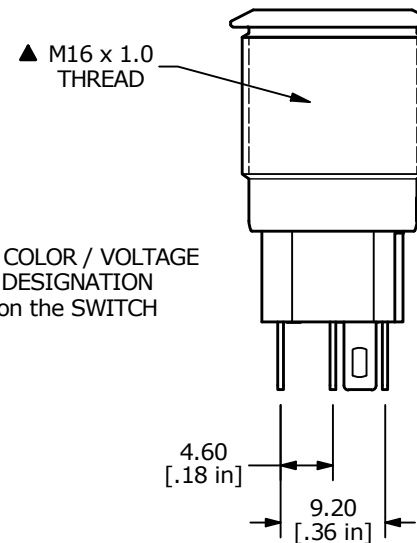


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
C - NC	C - NO

(ON) = MOMENTARY

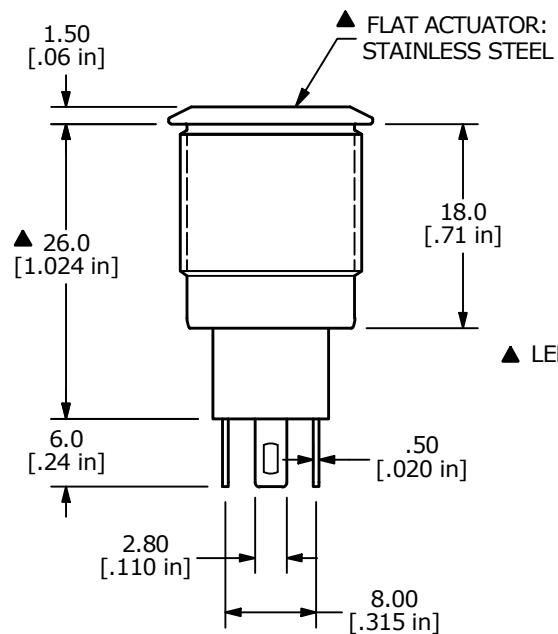

- NOTE:
- ALL DIMENSIONS IN mm [INCH]
 - GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - CONTACT MATERIAL: SILVER
 - RATING: 2A 36VDC
 - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - INSULATION RESISTANCE: 1,000 MΩ MIN.
 - DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
 - CONTACT RESISTANCE: 50mΩ MAX.
 - OPERATING TEMP.: -25°C to 55°C
 - TRAVEL: 3.0mm
 - ▲ DENOTES CRITICAL PARAMETER
 - ACTUATION FORCE: 1.7N NOMINAL
 - INGRESS PROTECTION: IP65
 - HARDWARE SUPPLIED: O-RING and HEXNUT
 - ▲ LAMP VOLTAGE: 24V BLUE LED

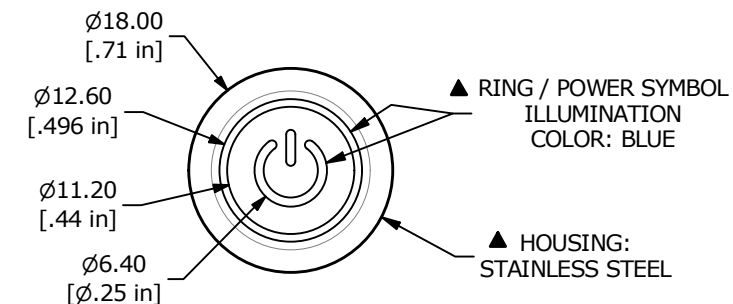

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-101698	Release	02/22/23	MW



OBJECT ID
100123671

TITLE PVA3F2B0SS645				
SCALE 3:2	DATE 2/21/2023	DR MW	DWG 52-PVA3F2B0SS645	REV A