
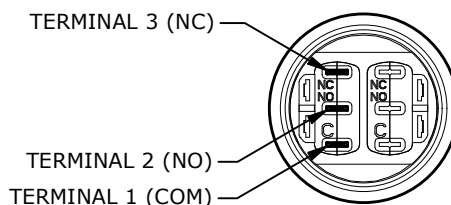
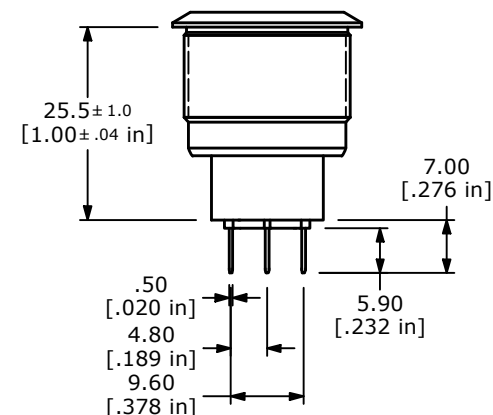
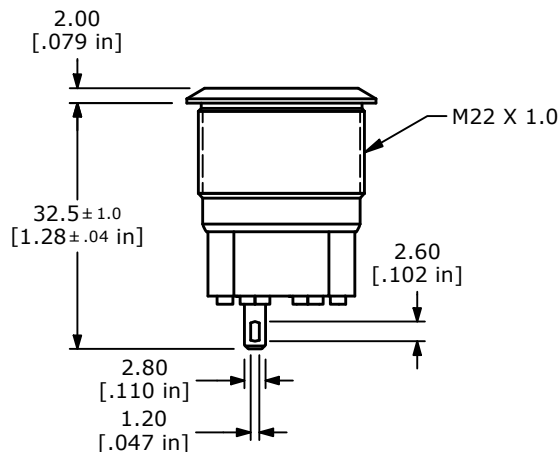
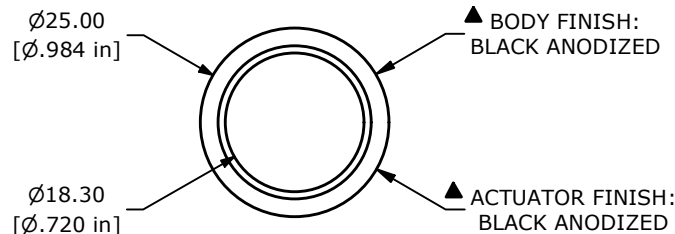


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 7.0 [0.28 in]

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2



- NOTES:
1. DIMENSIONS IN MM [INCH]
 2. ALL MATERIAL SHALL BE ROHS COMPLIANT
 3. TERMINAL NUMBERS FOR REF. ONLY
 4. CONTACT MATERIAL: SILVER
 5. RATING: 2A 24VDC / 5A 250VAC
 6. CONTACT RESISTANCE: 50mΩ MAX.
 7. ACTUATION FORCE: 2.5N
 8. OPERATING TEMP.: -40°C TO 85°C
 9. INSULATION RESISTANCE: 1,000 MΩ MIN.
 10. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 11. ELECTRIC LIFE: 50,000 CYCLES
 12. ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 13. ILLUMINATION VOLTAGE: NO LAMP
 - ▲ 14. INGRESS PROTECTION: IP67
 - ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
 - ▲ 16. USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-104049	NEW RELEASE	04/14/26	MR	TITLE PVB7F2B011				100132428
					SCALE 1:1	DATE 4/2/2026	DR MJR	DWG 52-PVB7F2B011	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED