


SHEET 1 OF 1

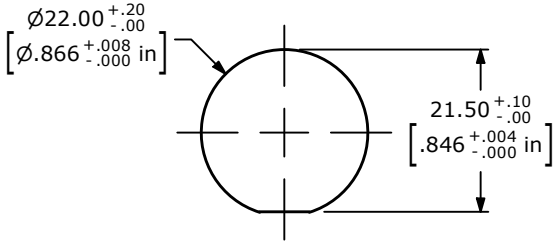


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 7.0 [0.28 in]

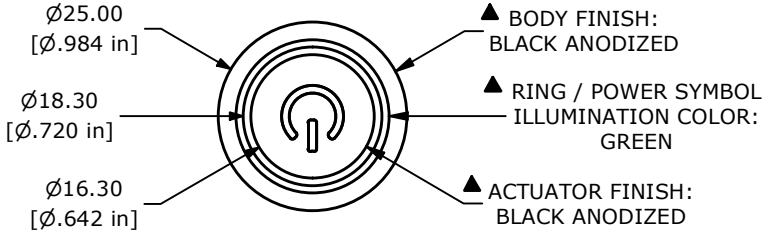





SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	ON
1-3, 4-6	1-2, 4-5




▲ SCHEMATIC
2P ON-ON
DPDT ILLUMINATED

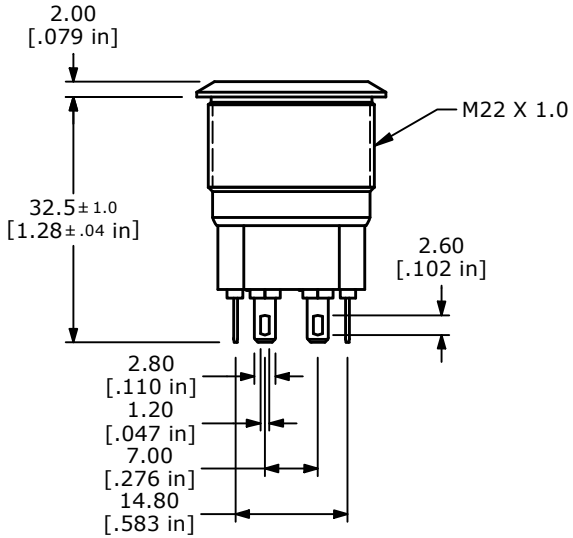

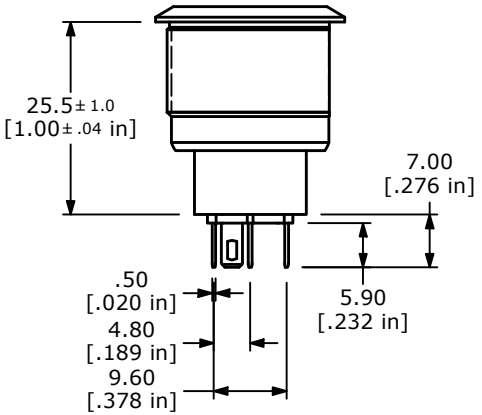

NOTES:
1. DIMENSIONS IN MM [INCH]
2. ALL MATERIAL SHALL BE ROHS COMPLIANT
3. TERMINAL NUMBERS FOR REF. ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC / 5A 250VAC
6. CONTACT RESISTANCE: 50mΩ MAX.
7. ACTUATION FORCE: 2.5N
8. OPERATING TEMP.: -40°C TO 85°C
9. INSULATION RESISTANCE: 1,000 MΩ MIN.
10. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
11. ELECTRIC LIFE: 50,000 CYCLES
12. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 13. ILLUMINATION VOLTAGE: 12V
- ▲ 14. INGRESS PROTECTION: IP67
- ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
- ▲ 16. USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

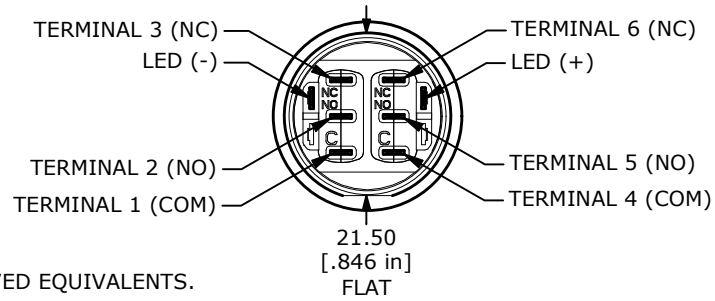

REV	ECO NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 100132429

TITLE PVB7F2G011634

SCALE	DATE	DR	DWG	REV
1:1	4/15/2026	MJR	52-PVB7F2G011634	A