

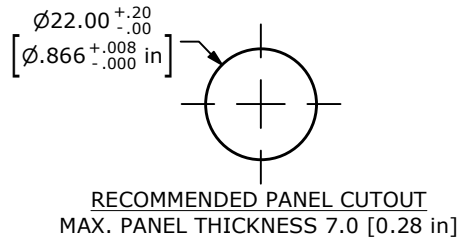
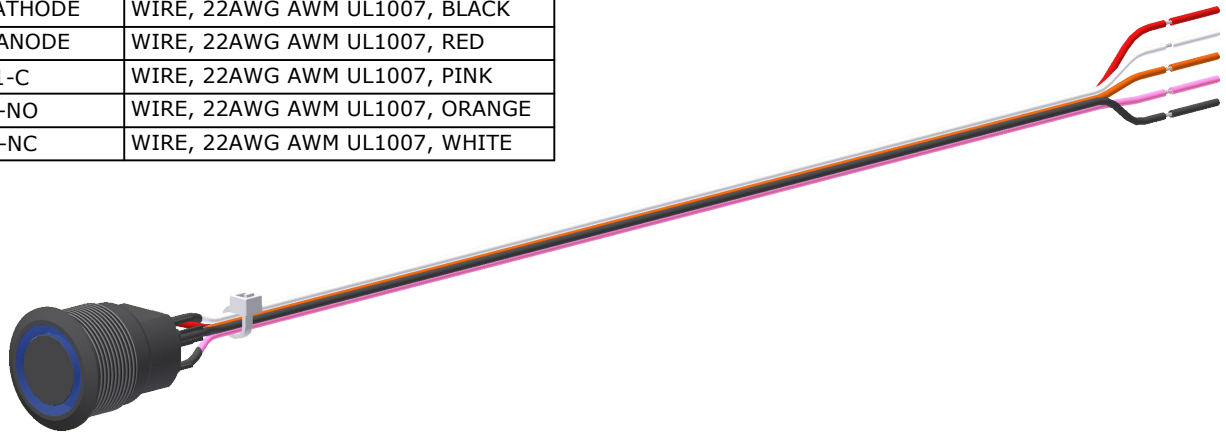
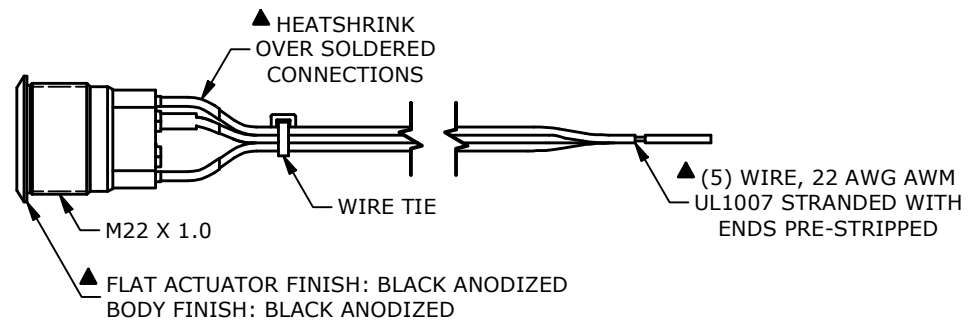


▲ SCHEMATIC
1P ON-(ON)
SPDT ILLUMINATED
() DENOTES MOMENTARY

SWITCH	WIRE
SW1-(-) CATHODE	WIRE, 22AWG AWM UL1007, BLACK
SW1-(+) ANODE	WIRE, 22AWG AWM UL1007, RED
SW1-1-C	WIRE, 22AWG AWM UL1007, PINK
SW1-2-NO	WIRE, 22AWG AWM UL1007, ORANGE
SW1-3-NC	WIRE, 22AWG AWM UL1007, WHITE

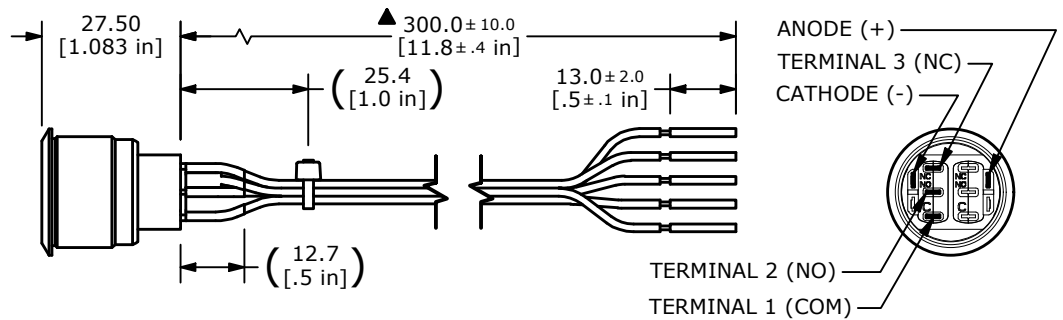

- NOTES:
1. DIMENSIONS IN MM [INCH]
 2. ALL MATERIAL SHALL BE ROHS COMPLIANT
 3. TERMINAL NUMBERS FOR REF. ONLY
 4. CONTACT MATERIAL: SILVER
 5. RATING: 2A 24VDC / 5A 250VAC
 6. CONTACT RESISTANCE: 50mΩ MAX.
 7. ACTUATION FORCE: 2.5N
 8. OPERATING TEMP.: -40°C TO 85°C
 9. INSULATION RESISTANCE: 1,000 MΩ MIN.
 10. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 11. ELECTRIC LIFE: 50,000 CYCLES
 12. ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 13. ILLUMINATION VOLTAGE: 12V
 - ▲ 14. INGRESS PROTECTION: IP67
 - ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
 - ▲ 16. USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

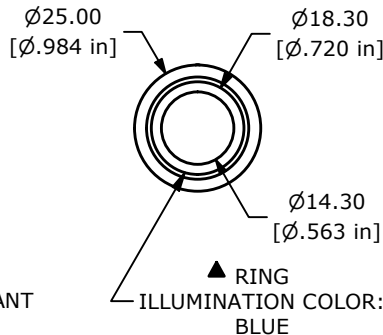

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-104049	NEW RELEASE	04/09/26	MR	PVB7FWB011344				100132369
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:3	4/2/2026	MJR	52-PVB7FWB011344	A