
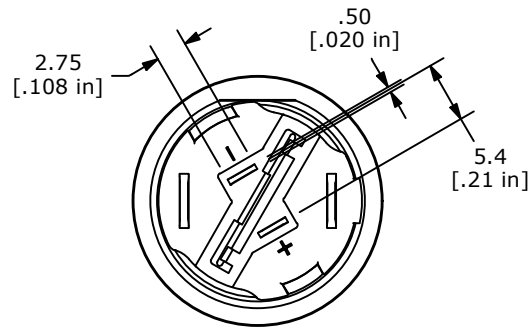
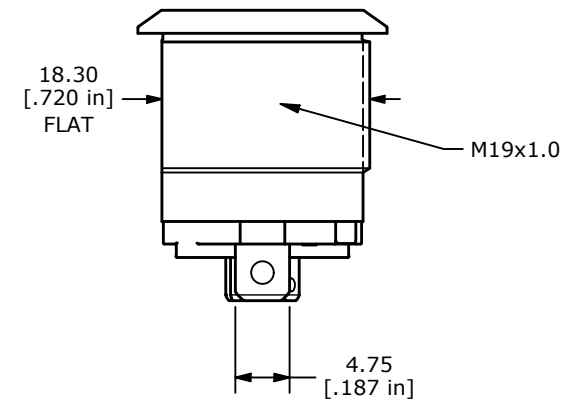
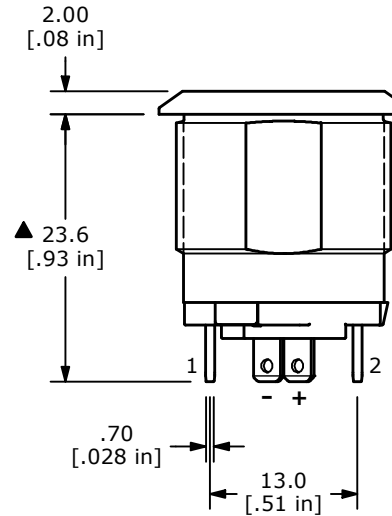
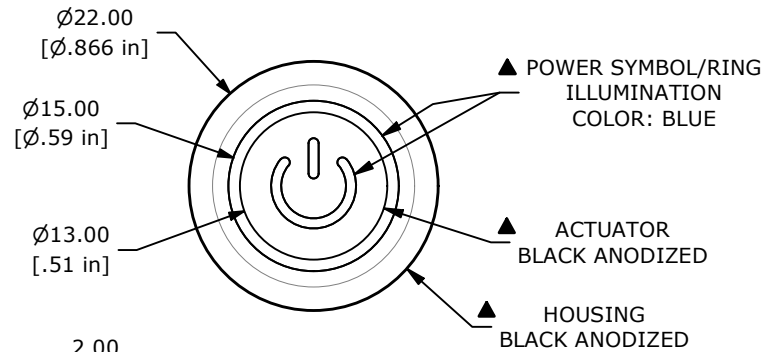


PANEL CUTOUT
MAX. PANEL THICKNESS 6mm

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-2



- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. CONTACT MATERIAL: SILVER
 5. RATING: 20A/250VAC
 6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
 7. INSULATION RESISTANCE: 100M Ω @ 500VDC
 8. DIELECTRIC STRENGTH: 1,500 VAC
 9. CONTACT RESISTANCE: 100m Ω
 10. OPERATING TEMP.: -25°C to 55°C
 11. TRAVEL: 3.5mm
 12. ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 13. LAMP VOLTAGE: 12V
 - ▲ 14. ILLUMINATION COLOR: BLUE
 - ▲ 15. INGRESS PROTECTION: IP67
 - ▲ 16. HARDWARE SUPPLIED: O-RING AND HEXNUT

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102845	RELEASE	07/08/24	JS	TITLE PVHC4F2311644				100127784
					SCALE	DATE	DR	DWG	REV
					3:2	7/3/2024	JS	52-PVHC4F2311644	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED