
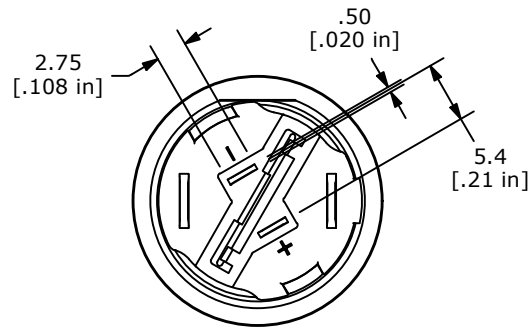
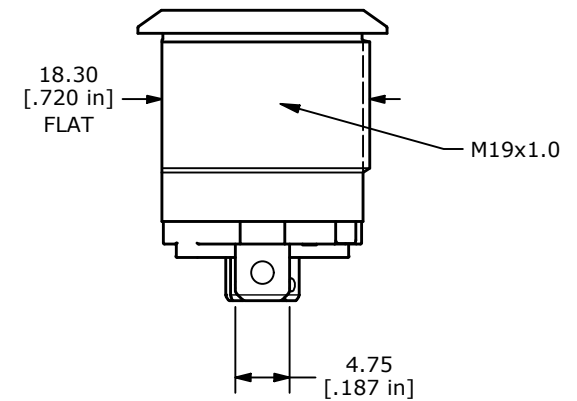
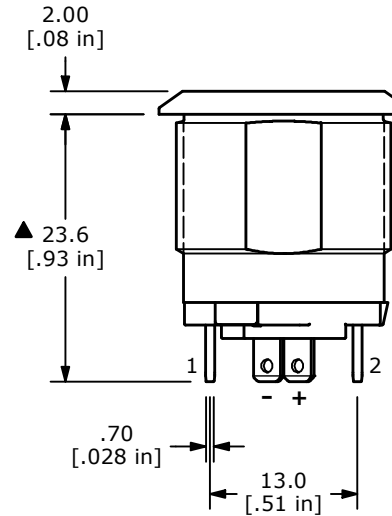
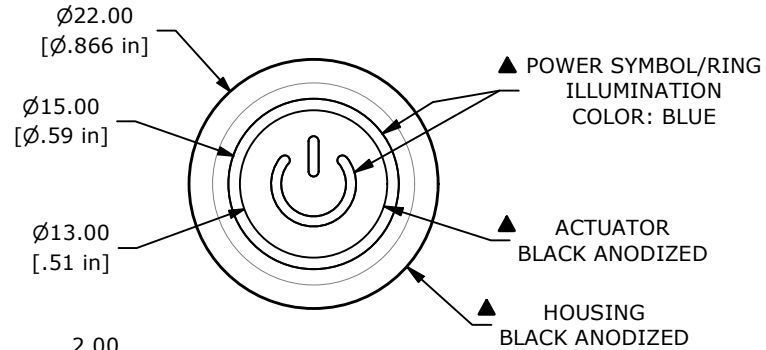


PANEL CUTOUT
MAX. PANEL THICKNESS 6mm

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-2



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 20A/250VAC
- ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
- INSULATION RESISTANCE: 100MΩ @ 500VDC
- DIELECTRIC STRENGTH: 1,500 VAC
- CONTACT RESISTANCE: 100mΩ
- OPERATING TEMP.: -25°C to 55°C
- TRAVEL: 3.5mm
- ▲ DENOTES CRITICAL PARAMETER.
- LAMP VOLTAGE: 24V
- ILLUMINATION COLOR: BLUE
- INGRESS PROTECTION: IP67
- HARDWARE SUPPLIED: O-RING AND HEXNUT

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102844	RELEASE	07/09/24	JS	TITLE PVHC4F2311645				100127783
					SCALE	DATE	DR	DWG	REV
					3:2	7/3/2024	JS	52-PVHC4F2311645	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED