


PANEL CUTOUT  
MAX. PANEL THICKNESS 6mm





| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| OFF             | ON     |
| OPEN            | 1-2    |



CONTACT CONFIGURATION  
FUNCTION: OFF-ON

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 20A/250VAC
- ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES  
AT FULL LOAD.
- INSULATION RESISTANCE: 100M $\Omega$  @ 500VDC
- DIELECTRIC STRENGTH: 1,500 VAC
- CONTACT RESISTANCE: 100m $\Omega$
- OPERATING TEMP.: -40°C to 85°C
- TRAVEL: 3.5mm
- ▲ DENOTES CRITICAL PARAMETER.
- LAMP VOLTAGE: 12V
- ILLUMINATION COLOR: BLUE
- INGRESS PROTECTION: IP67
- HARDWARE SUPPLIED: O-RING AND HEXNUT

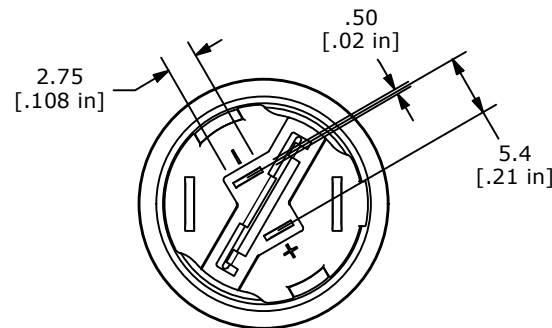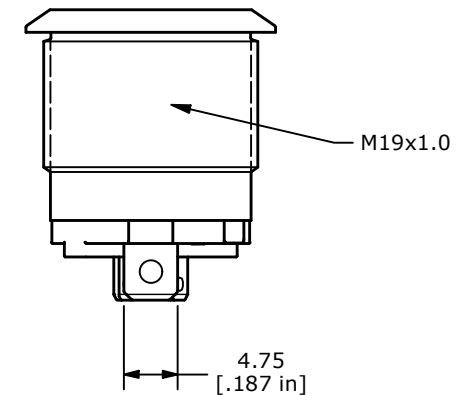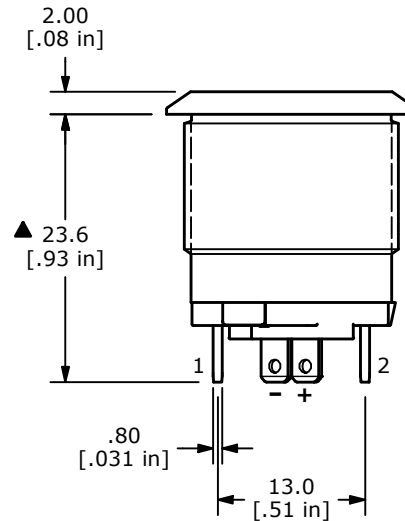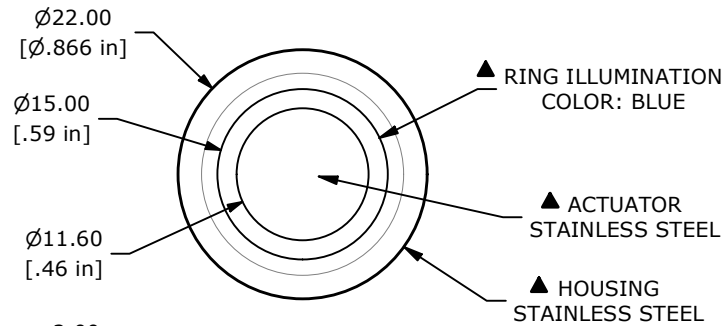

| REV | ECO NO     | DESCRIPTION  | DATE     | BY | E-SWITCH®           |           |    |                  | OBJECT ID |
|-----|------------|--------------|----------|----|---------------------|-----------|----|------------------|-----------|
| B   | ECO-103529 | PRINT UPDATE | 07/15/25 | JS | TITLE PVHC4F23SS344 |           |    |                  | 100127532 |
|     |            |              |          |    | SCALE               | DATE      | DR | DWG              | REV       |
|     |            |              |          |    | 3:2                 | 5/31/2024 | JS | 52-PVHC4F23SS344 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED