


PANEL CUTOUT
MAX. PANEL THICKNESS 6mm





SWITCH FUNCTION	
POS. 1	POS. 2
	
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY



CONTACT CONFIGURATION
FUNCTION: OFF - (ON)

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. CONTACT MATERIAL: SILVER
 5. RATING: 20A/250VAC
 6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
 7. INSULATION RESISTANCE: 100M Ω @ 500VDC
 8. DIELECTRIC STRENGTH: 1,500 VAC
 9. CONTACT RESISTANCE: 100m Ω
 10. OPERATING TEMP.: -25°C to 55°C
 11. TRAVEL: 3.5mm
 12. ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 13. LAMP VOLTAGE: N/A
 - ▲ 14. ILLUMINATION COLOR: NON-ILLUMINATED
 - ▲ 15. INGRESS PROTECTION: IP67
 - ▲ 16. HARDWARE SUPPLIED: O-RING AND HEXNUT

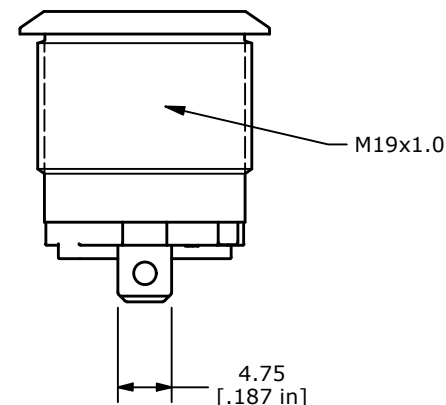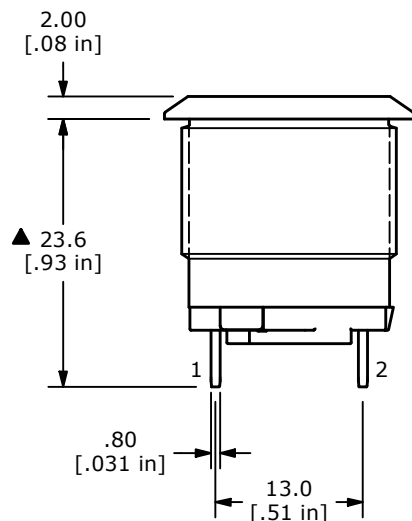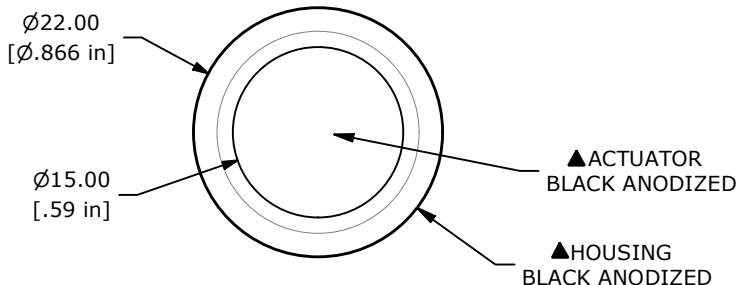

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102843	RELEASE	07/08/24	JS	TITLE PVHC4F2B11				100127780
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:2	DATE 7/3/2024	DR JS	DWG 52-PVHC4F2B11	REV A