


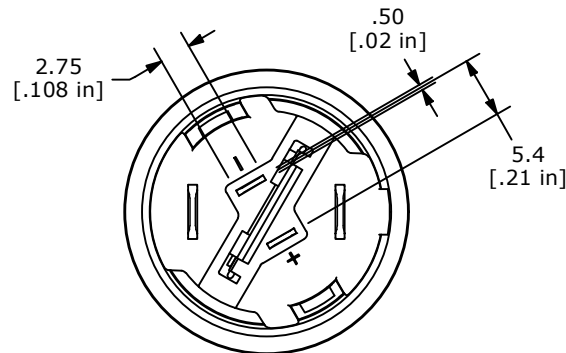
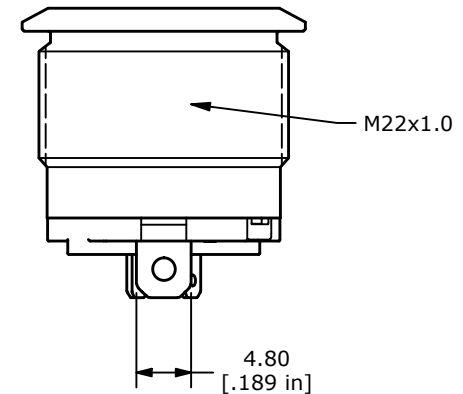


| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| OFF             | (ON)   |
| OPEN            | 1-2    |

(ON)=MOMENTARY

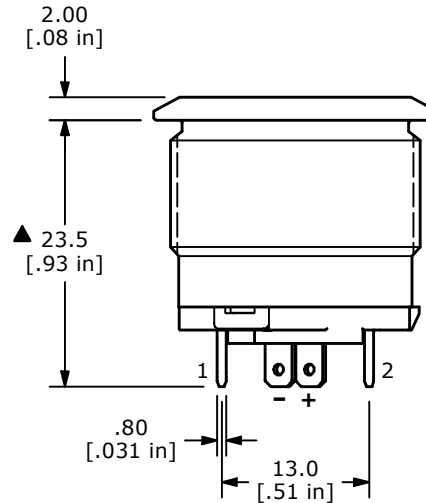

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X =  $\pm 0.4$   
 X.XX =  $\pm 0.25$
  - TERMINAL NUMBERS FOR REF ONLY
  - CONTACT MATERIAL: SILVER
  - RATING: 20A/250VAC
  - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
  - INSULATION RESISTANCE: 100M $\Omega$  @ 500VDC
  - DIELECTRIC STRENGTH: 1,500 VAC
  - CONTACT RESISTANCE: 100m $\Omega$
  - OPERATING TEMP.: -40°C to 85°C
  - TRAVEL: 3.5mm
  - ▲ DENOTES CRITICAL PARAMETER.
  - LAMP VOLTAGE: 24V
  - ILLUMINATION COLOR: BLUE
  - INGRESS PROTECTION: IP67
  - HARDWARE SUPPLIED: O-RING AND HEXNUT

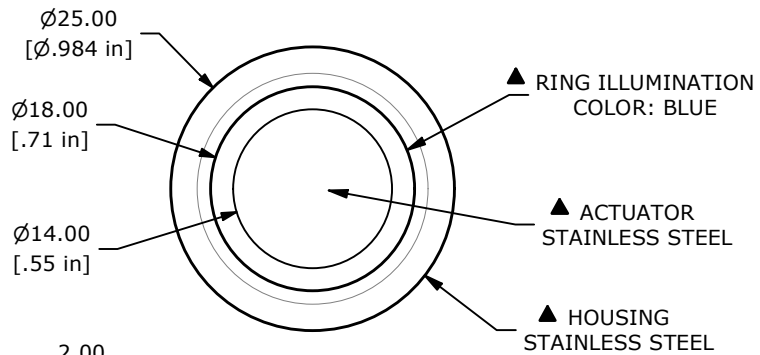

| REV | ECO NO     | DESCRIPTION  | DATE     | BY | E-SWITCH®           |                |       |                      | OBJECT ID |
|-----|------------|--------------|----------|----|---------------------|----------------|-------|----------------------|-----------|
| B   | ECO-103549 | PRINT UPDATE | 07/23/25 | JS | TITLE PVHC7F2BSS345 |                |       |                      | 100128330 |
|     |            |              |          |    | SCALE 3:2           | DATE 9/16/2024 | DR MW | DWG 52-PVHC7F2BSS345 | REV B     |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED