


PANEL CUTOUT
 MAX. PANEL THICKNESS
 10.0mm [.43]





SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-3	1-2



▲ SPDT ON-ON
 CONTACT CONFIGURATION

NOTE:

1. ALL DIMENSIONS IN mm [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
 X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES
 AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 M Ω MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
10. OPERATING TEMP.: -40°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. LAMP VOLTAGE: 24V
13. INGRESS PROTECTION: IP65
14. HARDWARE SUPPLIED: O-RING AND HEXNUT

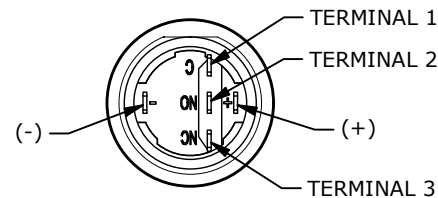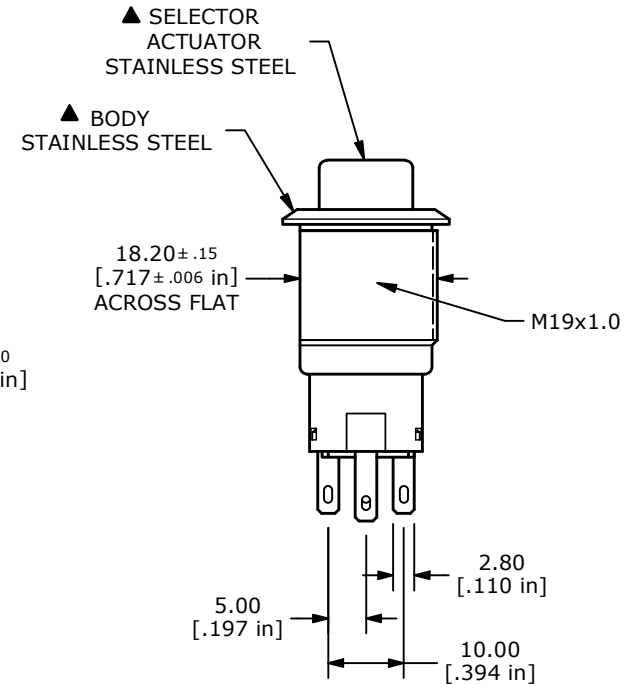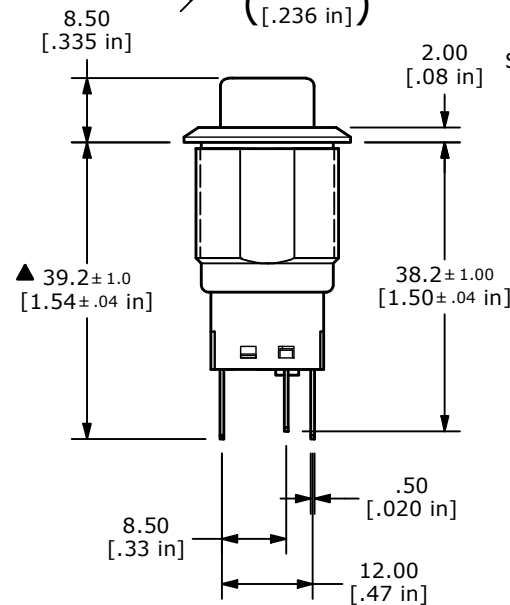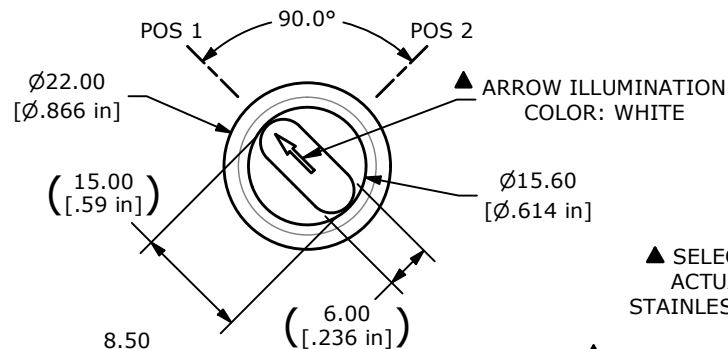

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-103528	PRINT UPDATE	07/14/25	JS	TITLE PVK4S21A0SS-A05				100124778
					SCALE	DATE	DR	DWG	REV
					1:1	5/24/2023	MW	52-PVK4S21A0SSA05	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
 E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED