

SHEET 1 OF 1



RECOMMENDED PANEL MOUNTING 1-6mm THICKNESS




LED SCHEMATIC


NOTE:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE: X.X = ±0.4

 $X.XX = \pm 0.25$


- 3. TERMINAL NUMBERS FOR REF ONLY
- 4. OPERATING TEMP: -40°C to 85°C
- 5. CURRENT RATING: 2mA-20mA
- ▲ 6. LAMP VOLTAGE: 12V
 - 7. IP RATING: IP67
- 8. ▲ DENOTES CRITICAL PARAMETER.
- 9. HARDWARE SUPPLIED: O-RING AND HEXNUT



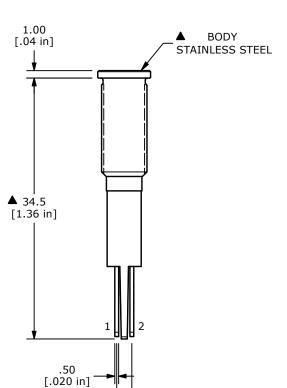

2.00 [.08 in]



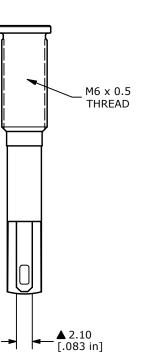

REV	ECO NO	DESCRIPTION	DATE	BY					
В	ECO-103562	PRINT UPDATE	07/31/25	JS					
	THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED								

BY	OBJECT A0040400										
JS	100121060										
	TITLE PVL06FLS14										
	SCALE 2:1	DATE 2/17/2022	DR MW	DWG 52-PVL06FLS14		REV B					