





RECOMMENDED
PANEL MOUNTING
1-6mm THICKNESS



LED SCHEMATIC

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. OPERATING TEMP: -25°C to 55°C
5. CURRENT RATING: 2mA-20mA
- ▲ 6. LAMP VOLTAGE: 24V
7. IP RATING: IP67
8. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 9. HARDWARE SUPPLIED: O-RING AND HEXNUT

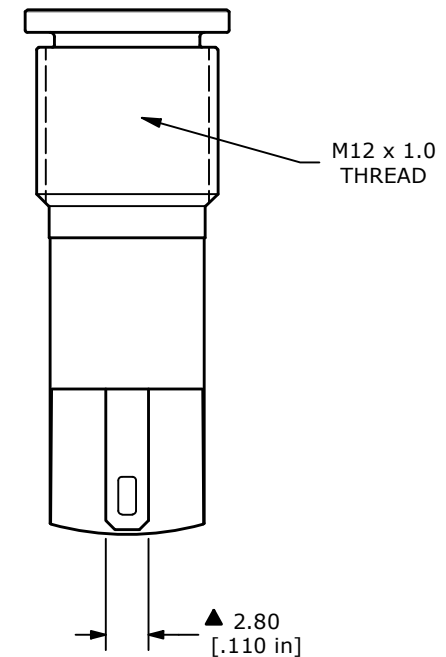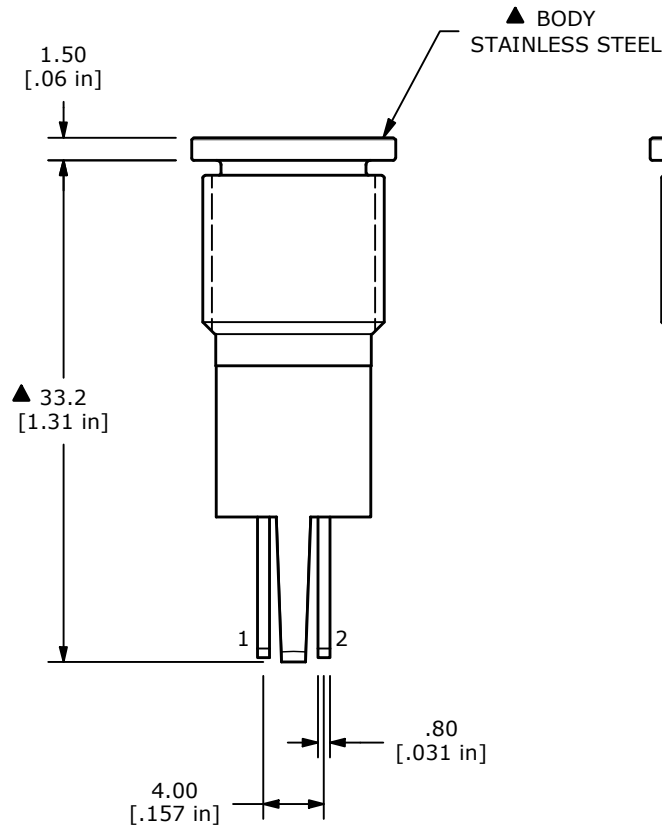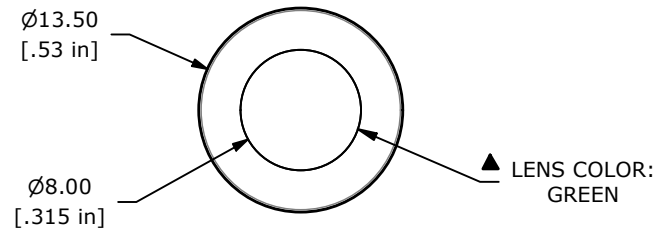

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102484	Release	01/16/24	MW	TITLE PVL12FLS35				100126611
					SCALE	DATE	DR	DWG	REV
					2:1	1/15/2024	MW	52-PVL12FLS35	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED