

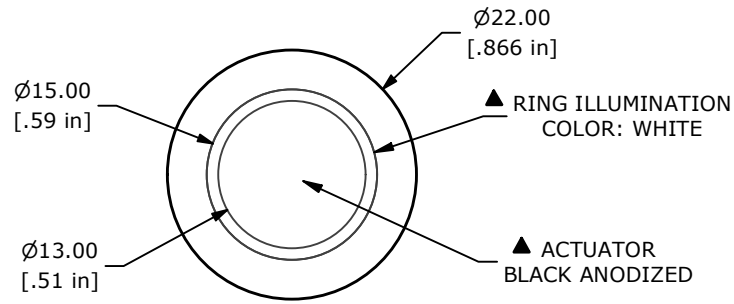
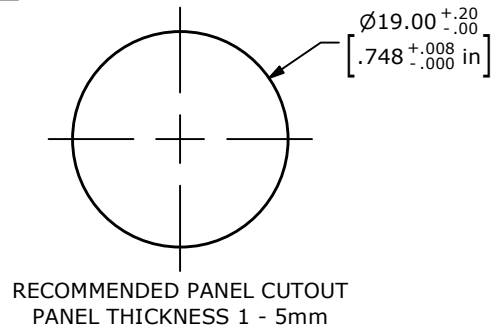
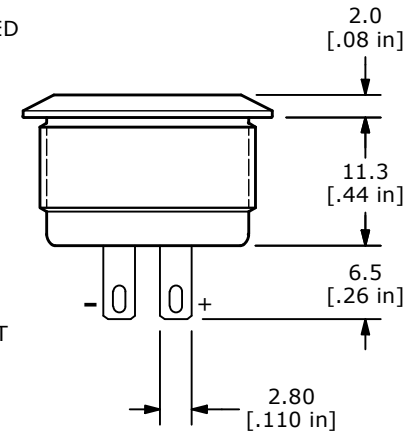


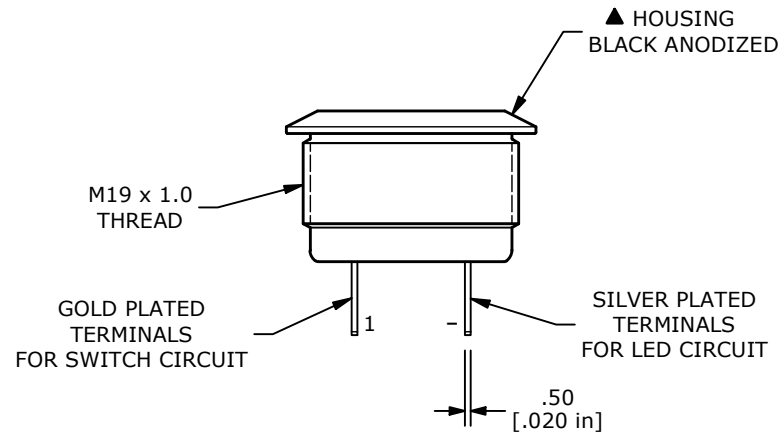


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
None	1-2

() = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER PLATED
- RATING: 50mA 24VDC
- ELECTRICAL LIFE: 500,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
- INSULATION RESISTANCE: 1000M Ω MIN.
- DIELECTRIC STRENGTH: 250 VAC MIN. FOR 1 MINUTE
- CONTACT RESISTANCE: 100m Ω MAX.
- OPERATING TEMP.: -25°C to +55°C
- TRAVEL: 0.5mm
- ▲ DENOTES CRITICAL PARAMETER.
- INGRESS PROTECTION: IP65
- ▲ LED VOLTAGE: 2.8V
- ▲ HARDWARE SUPPLIED: O-RING AND HEXNUT

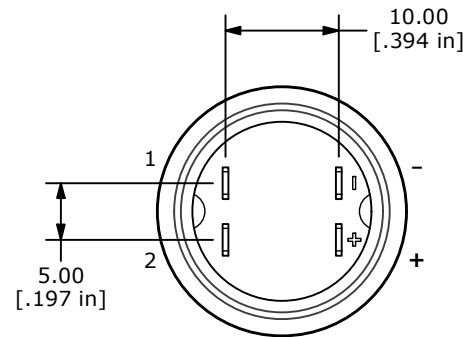

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103636	Release	09/02/25	MW	TITLE PVT4FS411301				100130951
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					3:2	8/29/2025	MW	52-PVT4FS411301	A