





SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
None	1-2

() = MOMENTARY

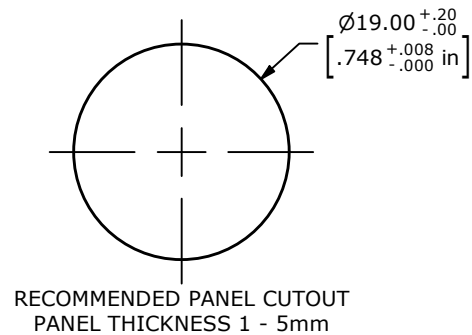

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: Silver
- RATING: 50mA 24VDC
- ELECTRIC LIFE: 500,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1000 M Ω MIN.
- DIELECTRIC STRENGTH: 250 VAC MIN. FOR 1 MINUTE
- CONTACT RESISTANCE: 100m Ω MAX.
- OPERATING TEMP.: -40°C to +85°C
- TRAVEL: 0.5mm
- ▲ DENOTES CRITICAL PARAMETER.
- INGRESS PROTECTION: IP65
- ▲ LED VOLTAGE: 12V
- HARDWARE SUPPLIED: O-RING AND HEXNUT

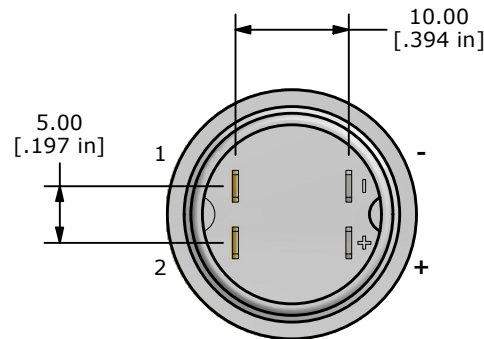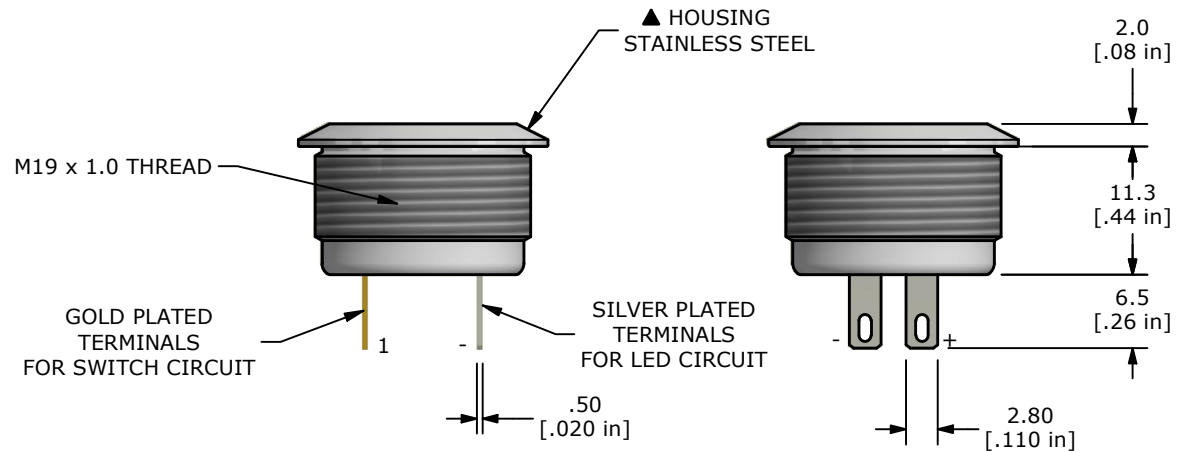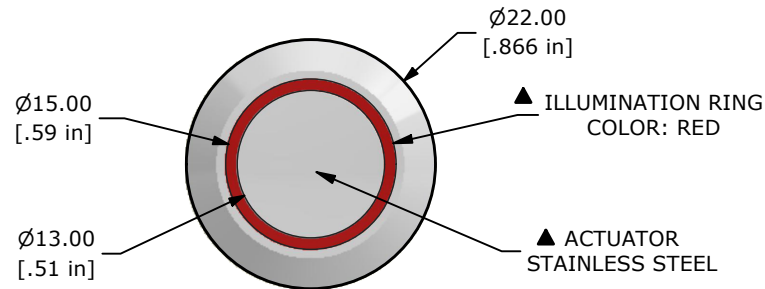

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-103542	PRINT UPDATE	07/25/25	JS	TITLE PVT4FS4SS314				000003330
					SCALE 3:2	DATE 3/19/2018	DR RC	DWG 52-PVT4FS4SS314	REV D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED