
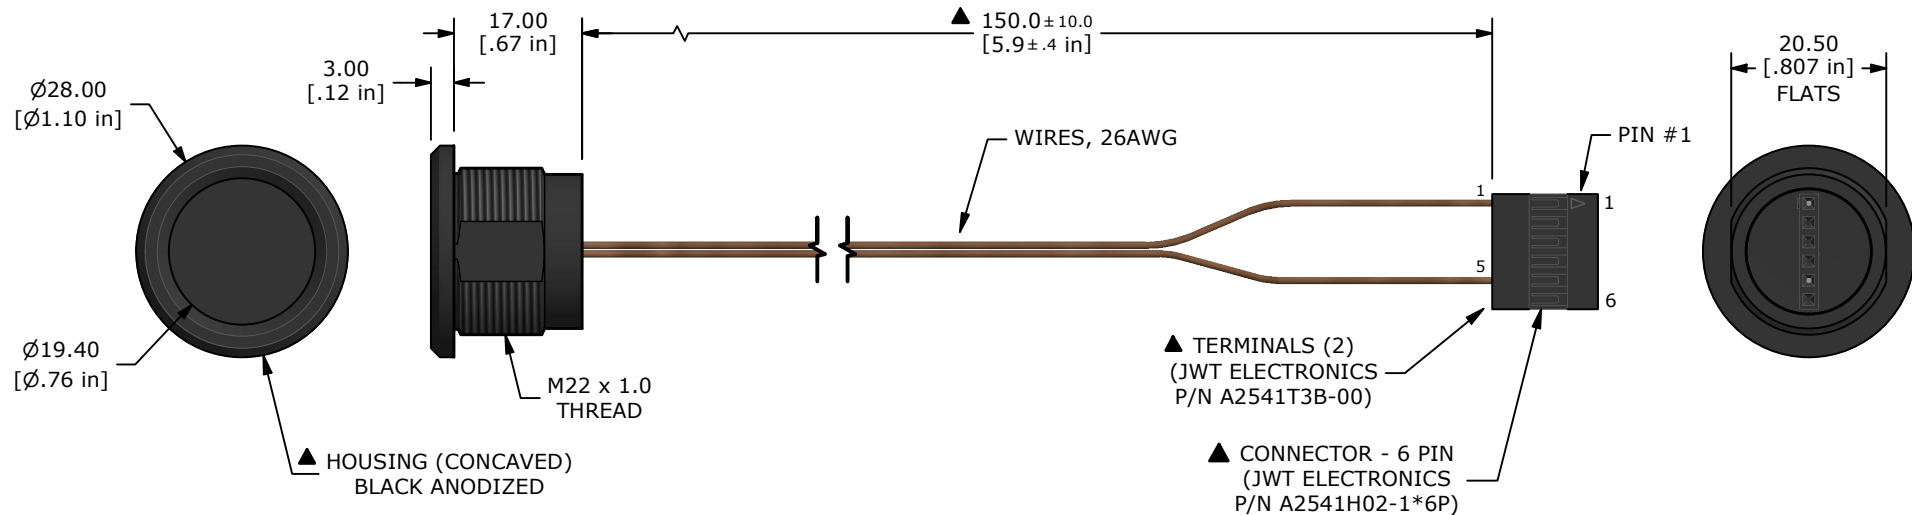


RECOMMENDED PANEL CUT-OUT
MAX. PANEL THICKNESS: 10mm

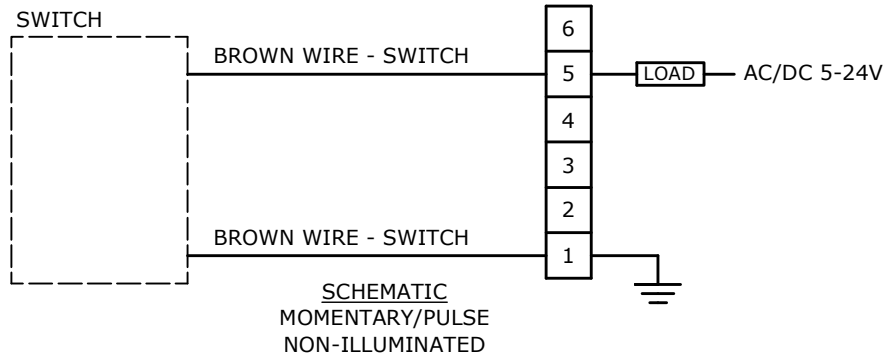

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. CONTACT RESISTANCE: 1 OHM MAX.
 4. RATING: 1A @ 5-24VDC
 5. ELECTRIC LIFE: 50,000,000 CYCLES
 6. OPERATING TEMP.: -20°C to 65°C
 7. ▲ DENOTES CRITICAL PARAMETER.
 8. HARDWARE SUPPLIED: O-RING and HEXNUT

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103257	RELEASE	02/27/25	JS	TITLE PZ7M1CNNW150				100129778
					SCALE	DATE	DR	DWG	REV
					1:1	2/25/2025	JS	T070125	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED