
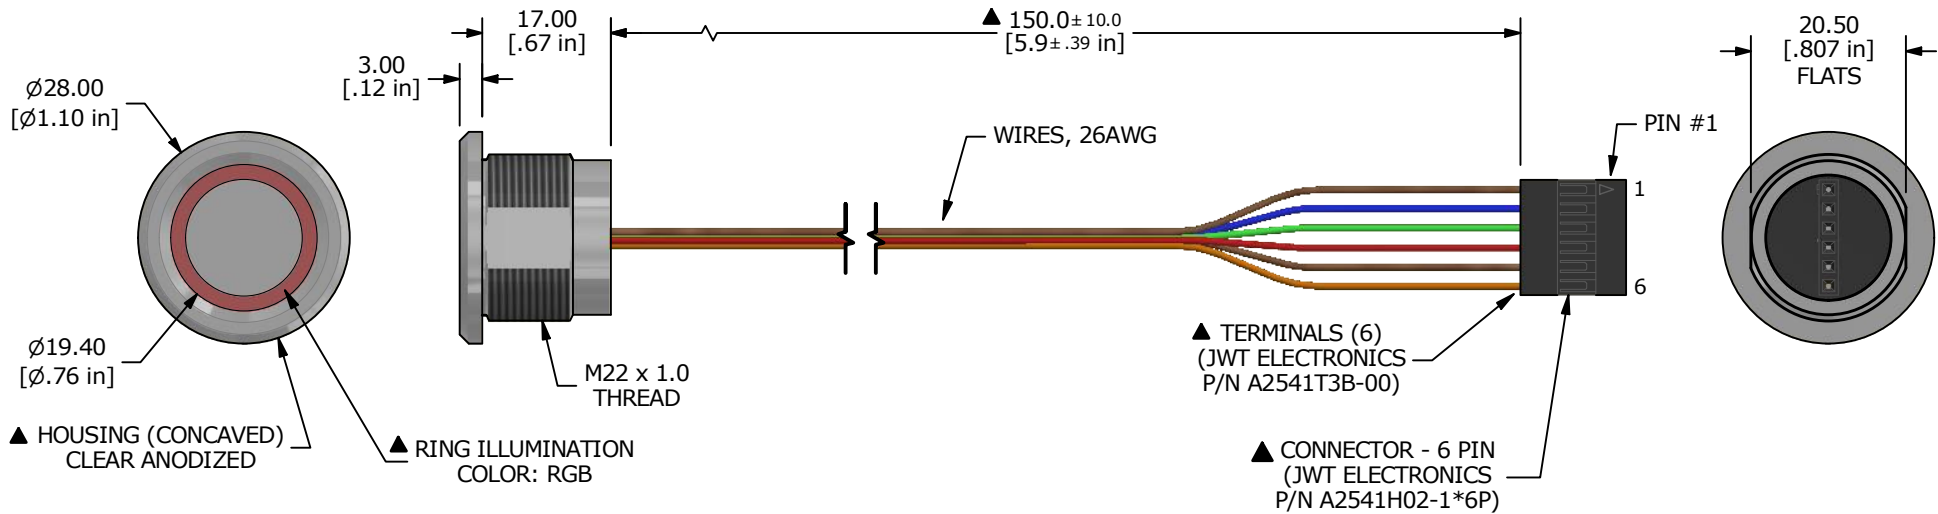
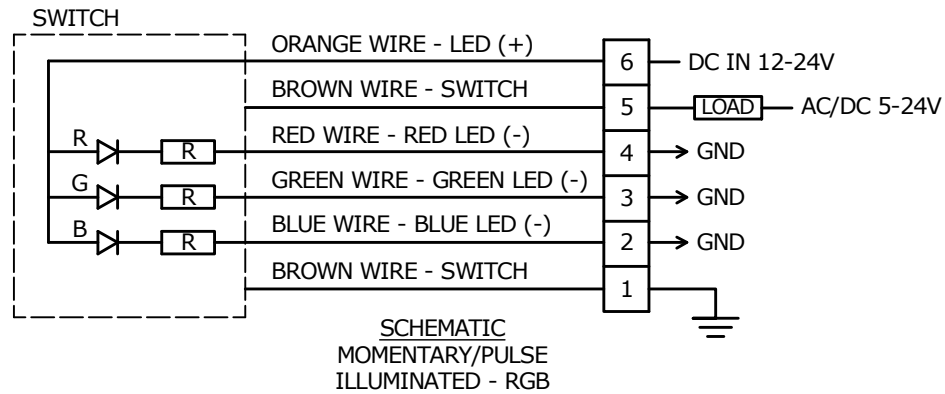


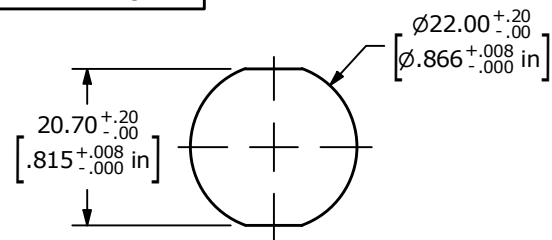

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
- CONTACT RESISTANCE: 1 OHM MAX.
- RATING: 1A @ 5-24VDC
- ELECTRIC LIFE: 50,000,000 CYCLES
- OPERATING TEMP.: -20°C to 65°C
- ▲ DENOTES CRITICAL PARAMETER.
- HARDWARE SUPPLIED: O-RING and HEXNUT

| REV | ECO NO     | DESCRIPTION  | DATE     | BY | E-SWITCH®          |                |       |             | OBJECT ID |
|-----|------------|--------------|----------|----|--------------------|----------------|-------|-------------|-----------|
| B   | ECO-101926 | UPDATE NOTES | 05/19/23 | JS | TITLE PZ7M2CRRW150 |                |       |             | 100117123 |
|     |            |              |          |    | SCALE 1:1          | DATE 6/11/2021 | DR MW | DWG T070102 | REV B     |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED