


RECOMMENDED PANEL MOUNTING





PANEL THICKNESS	X
0.70-1.25	19.2-19.3
1.25-2.00	19.3-19.4
2.00-3.00	19.5-19.6

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	NONE	ON
OPEN	N/A	1-1a



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 15A @ 125VAC [cURus]
10A @ 250VAC [cURus]
6A @ 250VAC [VDE]
5. LED COLOR: GREEN
6. TERMINAL/CONTACTS: SILVER PLATED
7. ELECTRICAL LIFE: 10,000 CYCLES
8. CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
9. DIELECTRIC STRENGTH: >1,500V AC 1 MIN
10. ▲ DENOTES CRITICAL PARAMETER.

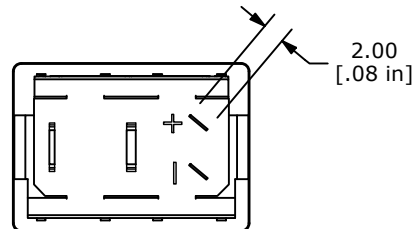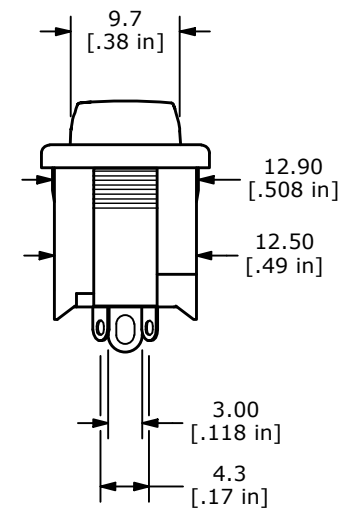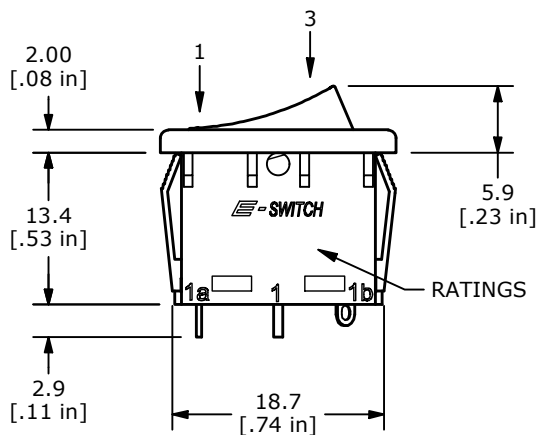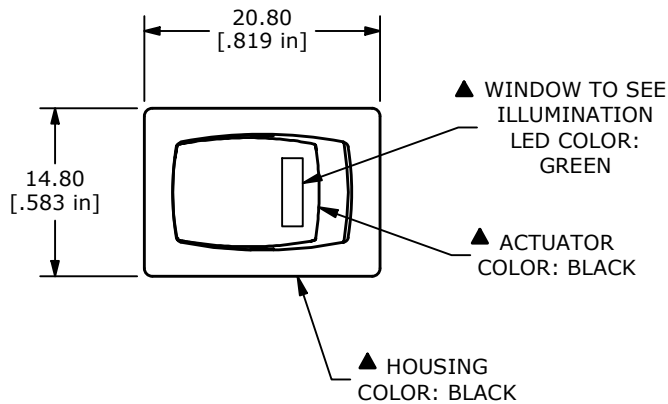

LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.0
LUMINOUS INTENSITY	mcd	30

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
E	ECO-103328	UPDATE NOTE 4	03/27/25	JS						000016582
					TITLE R1966ABLKBLKESGRN					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:2	DATE 10/16/1996	DR MM	DWG M301215	REV E	