

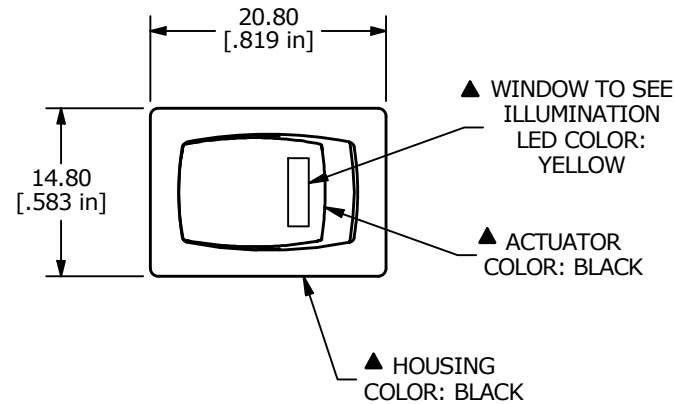
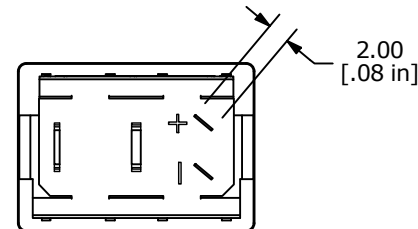
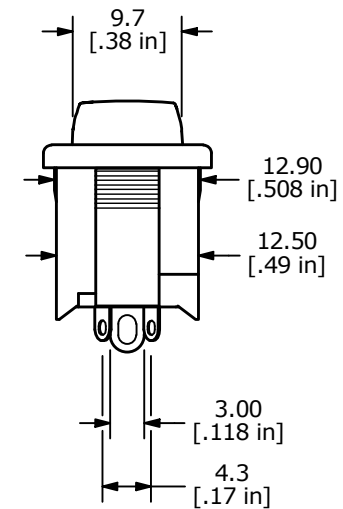


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.70-1.25	19.2-19.3
1.25-2.00	19.3-19.4
2.00-3.00	19.5-19.6

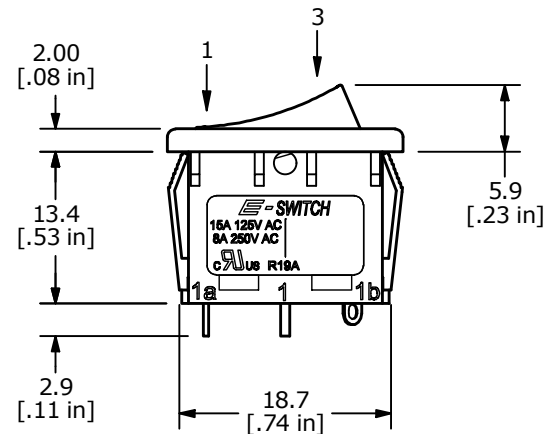

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	NONE	ON
OPEN	N/A	1-1a



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 15A @ 125VAC
8A @ 250VAC
- LED COLOR: YELLOW
- TERMINAL/CONTACTS: SILVER PLATED
- ELECTRICAL LIFE: 10,000 CYCLES
- CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
- DIELECTRIC STRENGTH: >1,500V AC 1 MIN
- ▲ DENOTES CRITICAL PARAMETER.

LED SPECS	UNITS	YELLOW
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.0
LUMINOUS INTENSITY	mcd	30

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®			OBJECT ID
C	ECO-101955	update housing	06/08/23	MW	TITLE R1966ABLKBLKESYEL			000016581
					SCALE 3:2	DATE 10/16/1996	DR MM	DWG M301214
								REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED