



RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	19.2-19.3
1.25-2.00	19.3-19.4
2.00-3.00	19.5-19.6

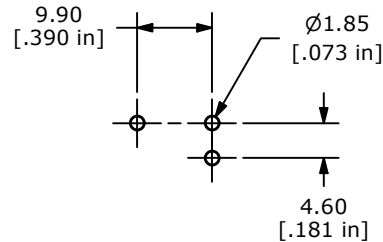






PCB MOUNTING

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
OFF	NONE	ON
OPEN	NONE	1-1a, 2-2a



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
- RATING: 6A @250VAC; 9A @125VAC (UL)
4(1)A @250VAC (VDE)
- LAMP VOLTAGE: 24 VDC, LED
- MATERIAL: CONTACT SURFACE: COIN SILVER, SILVER PLATE
TERMINAL: COPPER ALLOY W/SILVER PLATE
- CONTACT RESISTANCE: 20 mILLI-OHMS TYP. INITIAL
- INSULATION RESISTANCE: 1000 MEGA-OHMS
- DIELECTRIC STRENGTH: >1500VAC
- MECHANICAL LIFE: 30,000 CYCLES
- ELECTRICAL LIFE: 10,000 CYCLES
- OPERATING TEMP: -30°C TO 55°C
- ▲ DENOTES CRITICAL PARAMETER.

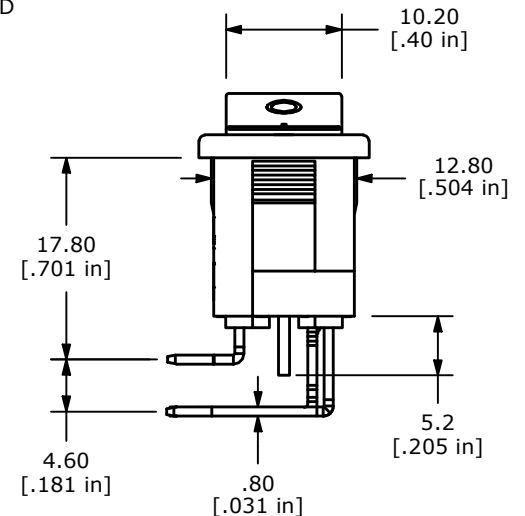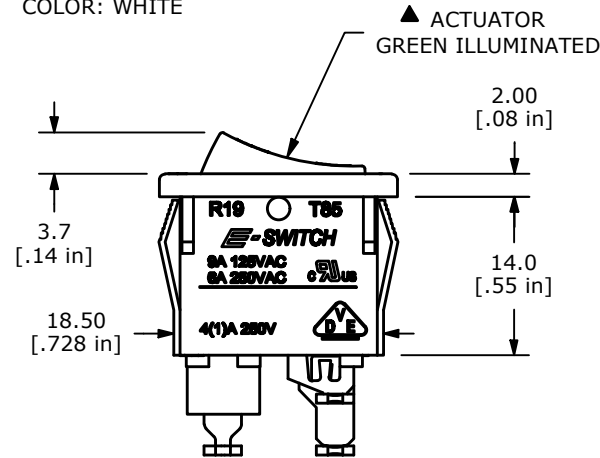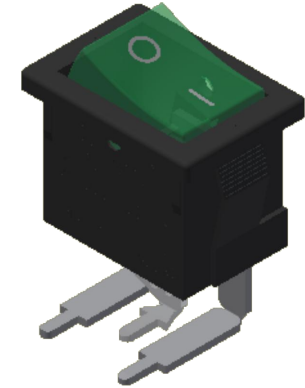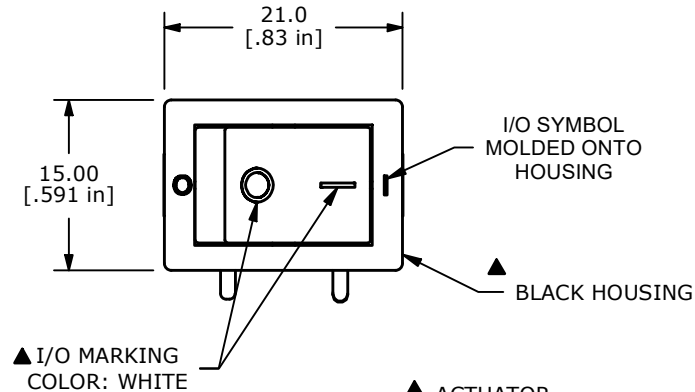

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102513	RELEASE	02/22/24	JS	TITLE R1973ABLKILFR4				100126714
					SCALE	DATE	DR	DWG	REV
					3:2	1/29/2024	JS	M400139	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED