






## RECOMMENDED PANEL MOUNTING

| PANEL THICKNESS | X         |
|-----------------|-----------|
| 0.70-1.25       | 19.2-19.3 |
| 1.25-2.00       | 19.3-19.4 |
| 2.00-3.00       | 19.4-19.6 |

CIRCUIT: DPST  
ON - OFF

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. RATING: 6A @250VAC (cURus)  
9A @125VAC (cURus)  
4(1)A @250VAC (VDE)
- ▲ 4. LAMP VOLTAGE: 24VDC (LED)
5. MATERIAL:  
CONTACT SURFACE: COIN SILVER, SILVER PLATE  
TERMINAL: COPPER ALLOY W/SILVER PLATE.
6. CONTACT RESISTANCE:  $< 20\text{m}\Omega$
7. INSULATION RESISTANCE: 1000M $\Omega$
8. DIELECTRIC STRENGTH:  $> 1500\text{V RMS min. @SEA LEVEL}$
9. MECHANICAL LIFE: 30,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES
11. ▲ DENOTES CRITICAL PARAMETER.

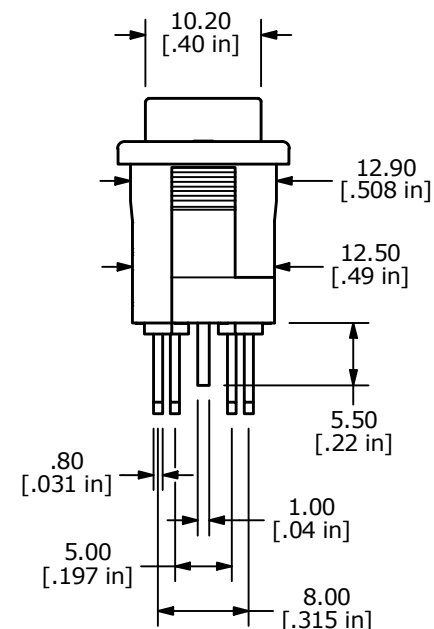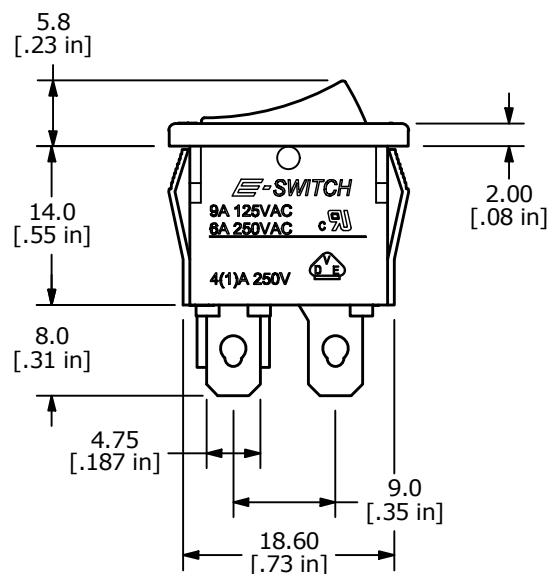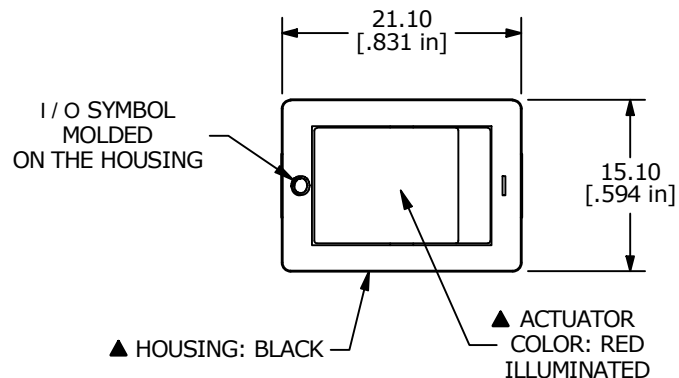

|     |        |                                   |         |    |
|-----|--------|-----------------------------------|---------|----|
| B   | 24414  | redrawn, Incandescent Bulb to LED | 7/23/20 | MW |
| A   | 14302  | RELEASED                          | 9/9/04  | AR |
| REV | PCR NO | DESCRIPTION                       | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE R1973BBLKRILEF4

SCALE 3:2

DATE 9/9/2004

DR AR

DWG M400085

REV B