


RECOMMENDED PANEL MOUNTING





PANEL THICKNESS	X
0.75-1.25	19.1-19.2
1.25-2.00	19.3-19.4
2.00-3.00	19.4-19.6



▲ CIRCUIT: DPST
ON - OFF

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 6A @250VAC (cURus)
9A @125VAC (cURus)
4(1)A @250VAC (VDE)
- ▲ 4. LAMP VOLTAGE: 12VDC (LED)
5. MATERIAL:
CONTACT SURFACE: COIN SILVER, SILVER PLATE
TERMINAL: COPPER ALLOY W/SILVER PLATE.
6. CONTACT RESISTANCE: $< 20\text{m}\Omega$
7. INSULATION RESISTANCE: $1000\text{M}\Omega$
8. DIELECTRIC STRENGTH: $> 1500\text{V RMS min. @SEA LEVEL}$
9. MECHANICAL LIFE: 30,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES
11. ▲ DENOTES CRITICAL PARAMETER.

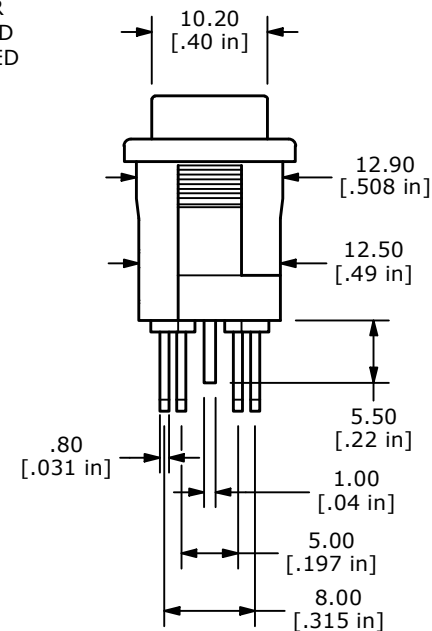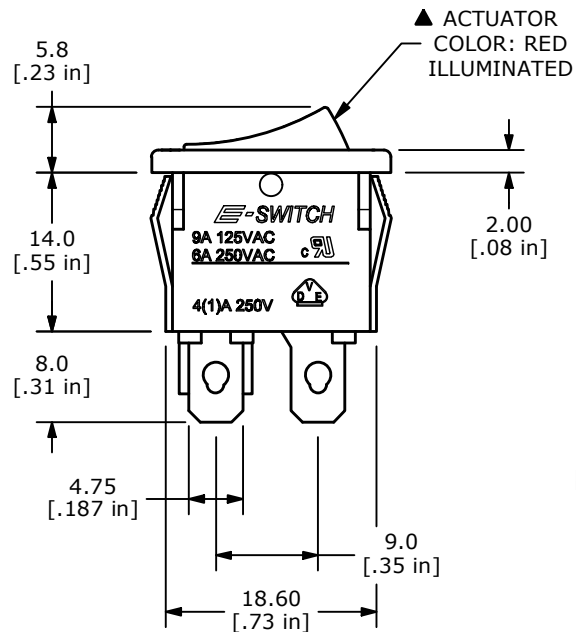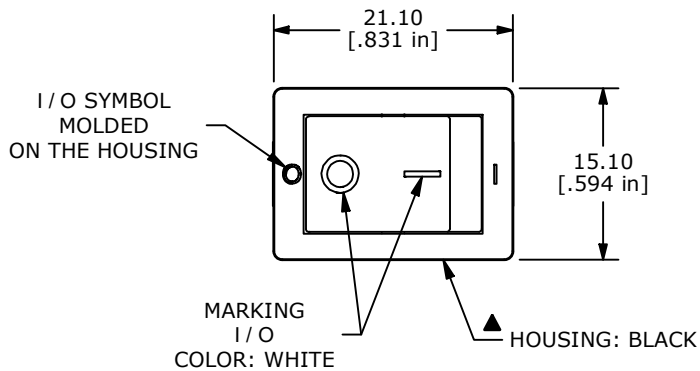

B	24414	redrawn and updated	7/23/20	MW
A	13443	RELEASED	9/10/03	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

OBJECT ID
000016707

TITLE	R1973BBLKRILFF3
-------	-----------------

SCALE 3:2

DATE	9/10/2003
------	-----------

DR	AR
----	----

DWG	M400078
-----	---------

REV
B