

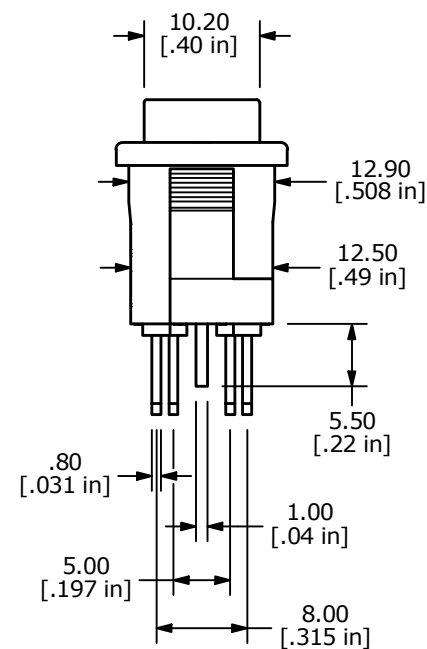
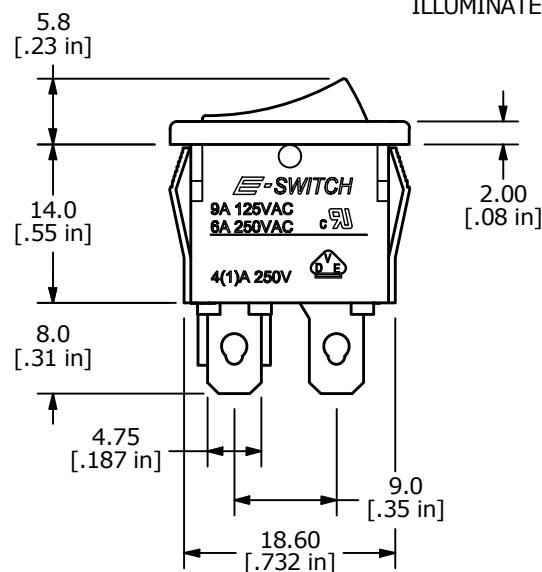
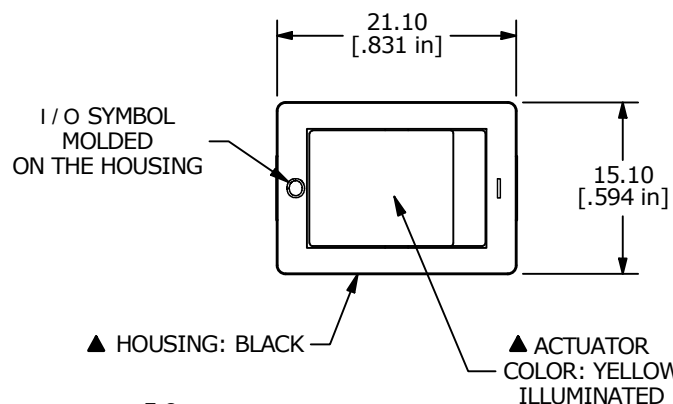


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.70-1.25	19.1-19.2
1.25-2.00	19.3-19.4
2.00-3.00	19.4-19.6

CIRCUIT: DPST
ON - OFF

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- RATING: 6A @250VAC (cURus)
9A @125VAC (cURus)
4(1)A @250VAC (VDE)
- LAMP VOLTAGE: 12VDC (LED)
- MATERIAL:
CONTACT SURFACE: COIN SILVER, SILVER PLATE
TERMINAL: COPPER ALLOY W/SILVER PLATE.
- CONTACT RESISTANCE: $< 20\text{m}\Omega$
- INSULATION RESISTANCE: 1000M Ω
- DIELECTRIC STRENGTH: $> 1500\text{V RMS min. @SEA LEVEL}$
- MECHANICAL LIFE: 30,000 CYCLES.
- ELECTRICAL LIFE: 10,000 CYCLES
- ▲ DENOTES CRITICAL PARAMETER.

C	24414	Incandescent Bulb to LED	7/23/20	MW
B	20747	CORRECTED ILLUMINATION INFORMATION	9/10/12	EBP
A	20672	RELEASE FOR PRODUCTION	7/23/12	RC
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE R1973BBLKYILEF3

SCALE 3:2

DATE 7/23/2012

DR RC

DWG M400107

REV C