


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X± 0.05
0.75-1.25	29.6-29.7
1.25-2.00	30.1-30.2
2.00-3.00	30.45-30.55




SWITCH FUNCTION	
POS. 1	POS. 3
ON	OFF
1-1a	OPEN



▲ HOUSING COLOR: BLACK

ROCKER COLOR: BLACK ▲

LENS COLOR: GREEN ▲

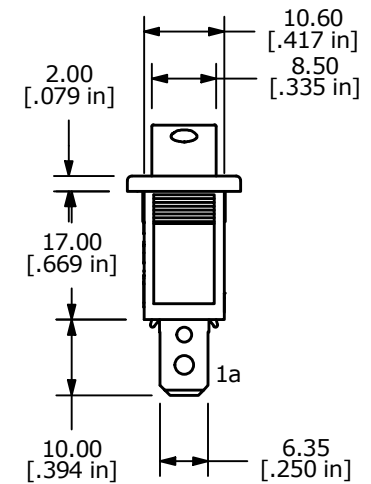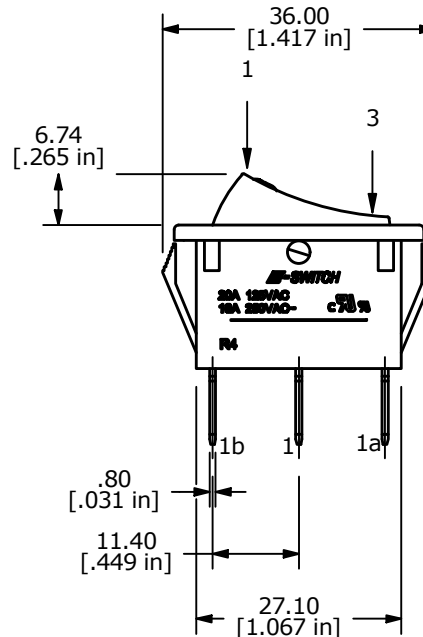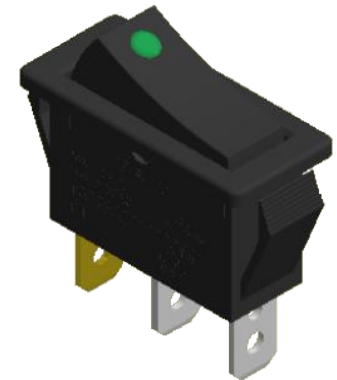

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
- TERM. NOS. FOR REF. ONLY
- ▲ RATING: 20A 125VAC, 16A 250VAC UL APPROVED
- ELECTRICAL LIFE: OVER 10,000 CYCLES
- MECHANICAL LIFE: OVER 30,000 CYCLES
- CONTACT RESISTANCE: $<20 \text{ m}\Omega$ (INITIAL)
- DIELECTRIC STRENGTH: $>1500\text{V } 1 \text{ min}$
- INSULATION RESISTANCE: $>1,000 \text{ m}\Omega @ 500\text{V DC}$
- LAMP VOLTAGE: NEON 250VAC
- OPERATING TEMPERATURE: TERMINAL SIDE -20°C to 85°C
ROCKER SIDE -20°C to 55°C
- ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
G	ECO-100502	REMOVE VDE/ENEC RATING AND LOGO	01/28/22	JS	R4BBLKBLKGRNEF2				000016386
					SCALE	DATE	DR	DWG	REV
					1:1	3/1/2006	RC	M040123	G

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED