
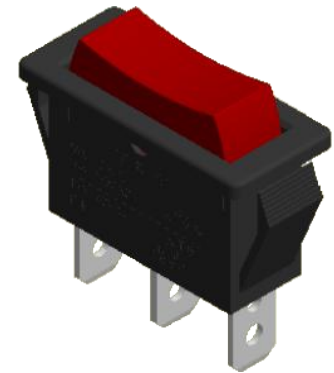





RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	$\bar{X} \pm 0.05$
0.75-1.25	29.65
1.25-2.00	30.15
2.00-3.00	30.50

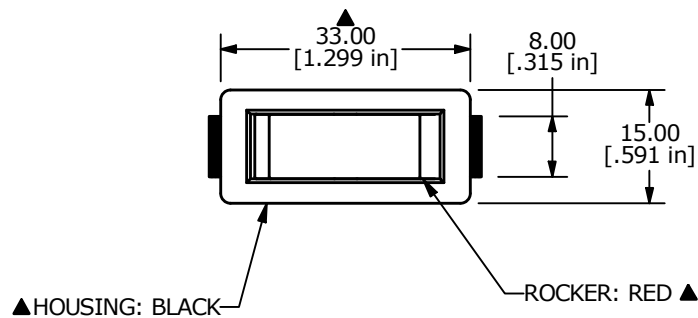

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
(ON)	OFF	ON
1-1a	OPEN	1-1b

(ON)=MOMENTARY

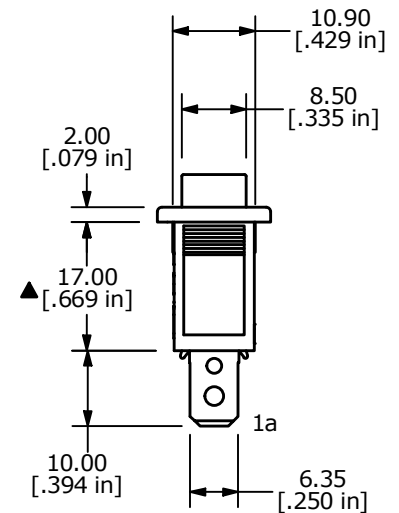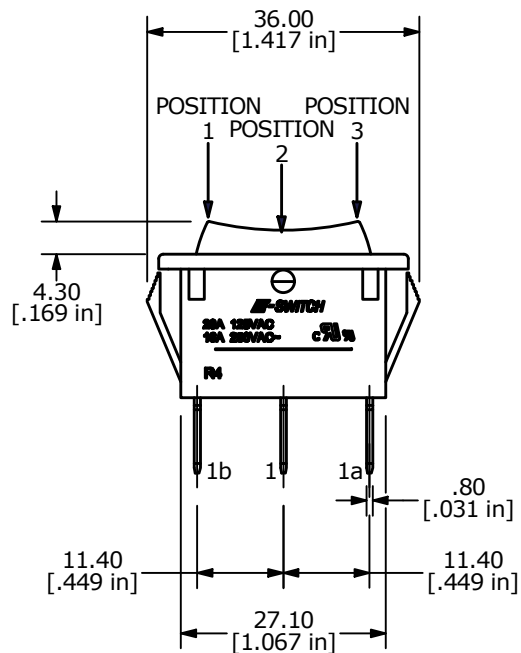

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X $\pm$ 0.4
X.XX $\pm$ 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 10A 250VAC, 15A 125VAC UL APPROVED
5. ELECTRICAL LIFE: OVER 10,000 CYCLES
6. MECHANICAL LIFE: OVER 30,000 CYCLES
7. CONTACT RESISTANCE: <20 m Ω (INITIAL)
8. DIELECTRIC STRENGTH: >1500V 1 min
9. INSULATION RESISTANCE: >1,000 m Ω @ 500V DC
10. OPERATING TEMPERATURE: TERMINAL SIDE -20°C to 85°C
ROCKER SIDE -20°C to 55°C
11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
F	ECO-100471	REMOVE VDE/ENEC RATING AND LOGO	01/28/22	JS						000016380
					TITLE R4IBLKREDEFO					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 1:1	DATE 2/27/2006	DR RC	DWG M040117	REV F	