


RECOMMENDED PANEL CUT-OUT




PANEL THICKNESS	X DIMENSION	Y DIMENSION
1.0 - 1.5mm	37.3 +0.1/-0.0	21.2 +0.1/-0.0
2.5 - 3.0mm	37.5 +0.1/-0.0	21.2 +0.1/-0.0
3.5 - 4.5mm	37.7 +0.1/-0.0	21.2 +0.1/-0.0

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-1; 5-4	OPEN	2-3; 5-6



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 16A @ 6-30VDC, μ T55
UL LISTED
- ELECTRICAL LIFE: 10,000 CYCLES
- MECHANICAL LIFE: 30,000 CYCLES
- CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
- DIELECTRIC STRENGTH: >1,500V AC 1MIN
- INSULATION RESISTANCE: >100 MOHMS @ 500VDC
- OPERATING TEMP: 0°C to 55°C
- LED VOLTAGE: 12V
- ▲ DENOTES CRITICAL PARAMETER.

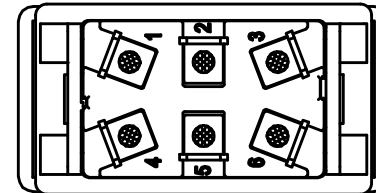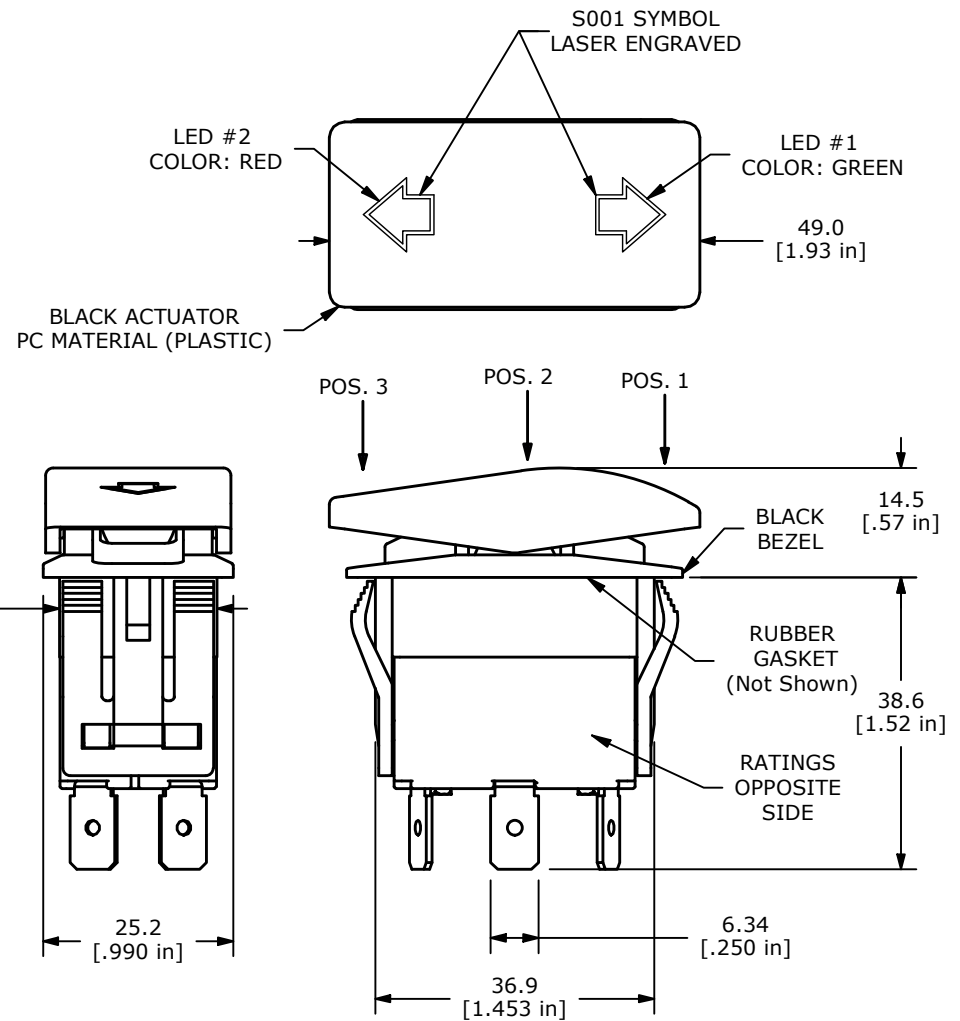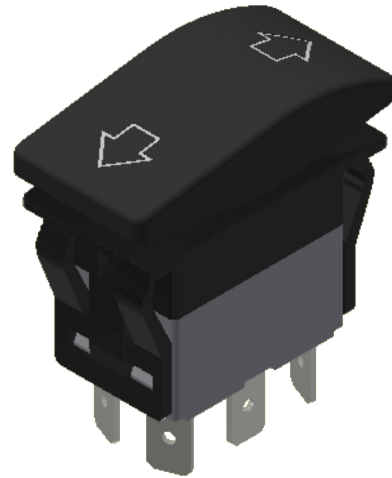

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103767	RELEASE	12/08/25	JS	TITLE R723FG1-S0012BDGRW				100131364
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					1:1	11/10/2025	JS	C700057	A