

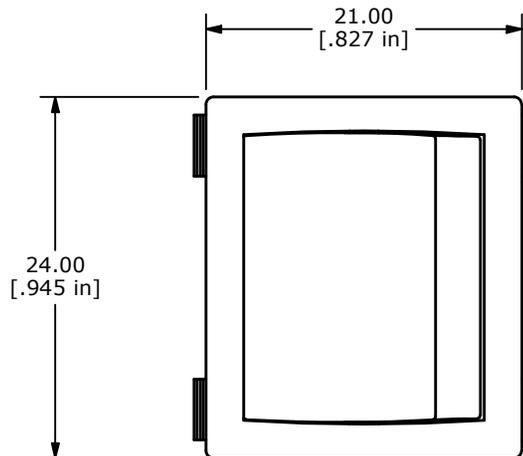


PANEL THICKNESS	X
0.75 - 1.25	19.2
1.25 - 2.00	19.4
2.00 - 3.00	19.6

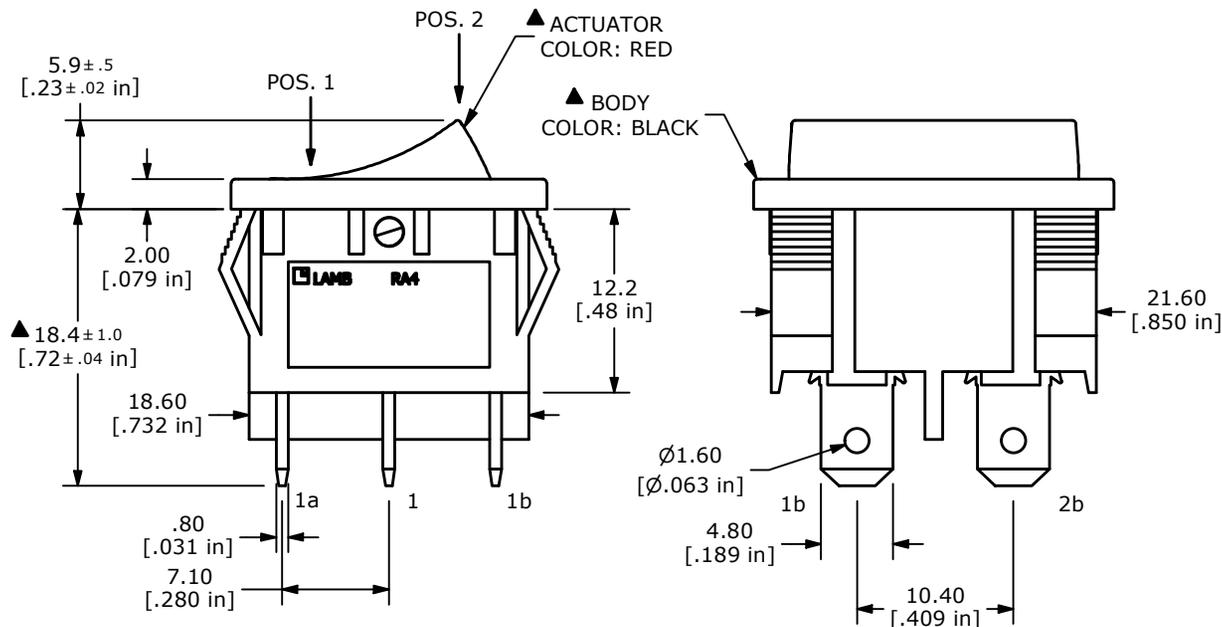

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-1b, 2-2b	1-1a, 2-2a

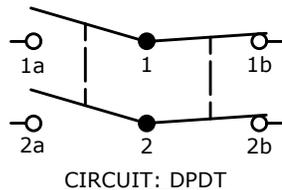

- NOTE:
1. DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
  3. TERMINAL NUMBERS FOR REF ONLY
  4. CONTACT MATERIAL: SILVER
  - ▲ 5. CONTACT RATINGS: 10A @ 125VAC [UR, cUR]
  6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC
  7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
  8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
  9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
  10. OPERATING TEMPERATURE: -20°C to 105°C [UR, cUR]
  11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-101328	RA4 SERIES UPDATE	11/01/22	MR	TITLE RA41G31900				000001435
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:1	7/13/2008	CAB	38-RA41G31900	D