
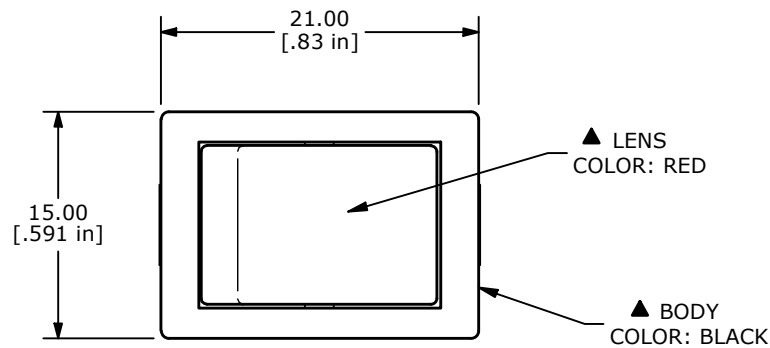


PANEL CUTOUT

PANEL THICKNESS	X
0.75 - 1.25	19.2
1.25 - 2.00	19.4
2.00 - 3.00	19.6





SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-1a, 2

CIRCUIT: SPST
OFF - ON

NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
- ▲ 5. CONTACT RATINGS: 16A 125VAC 1/3HP T105 [cURus]
10A 250VAC 1/3HP T105 [cURus]
6. CONTACT RESISTANCE: 35m Ω MAX. @ 50VAC
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
10. OPERATING TEMP.: -20°C to 105°C [UR, cUR]
11. ▲ DENOTES CRITICAL PARAMETER
- ▲ 12. LAMP VOLTAGE: 12V

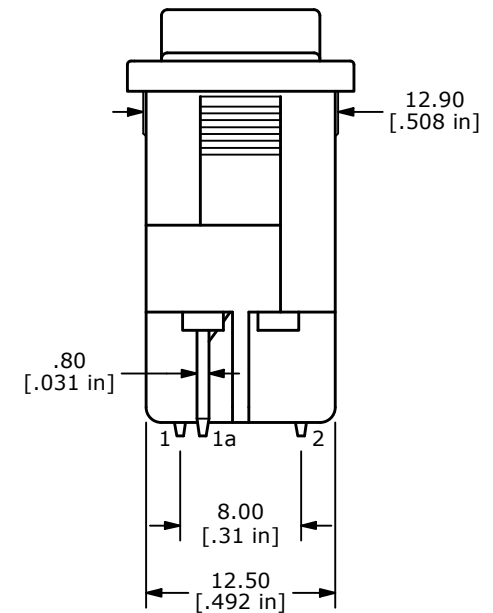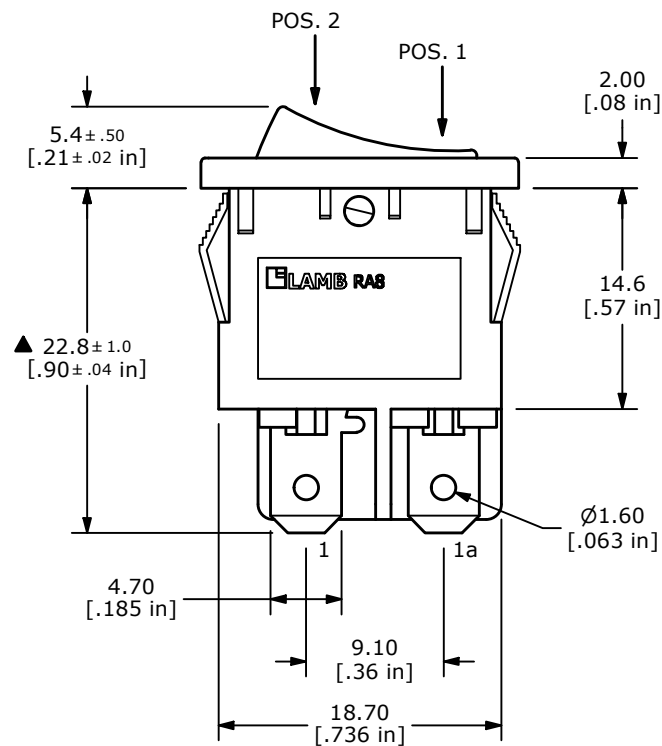

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-100740	NEW RELEASE	02/17/22	MW	TITLE RA811C1000-114				100121035
					SCALE	DATE	DR	DWG	REV
					2:1	2/15/2022	MJR	38-RA811C1000114	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED