


PANEL CUTOUT

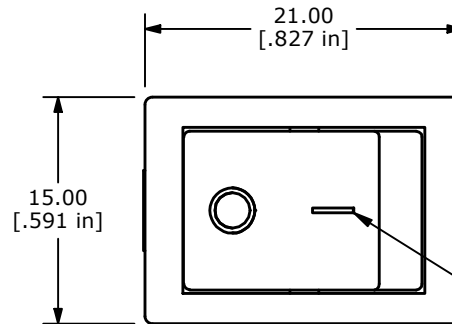
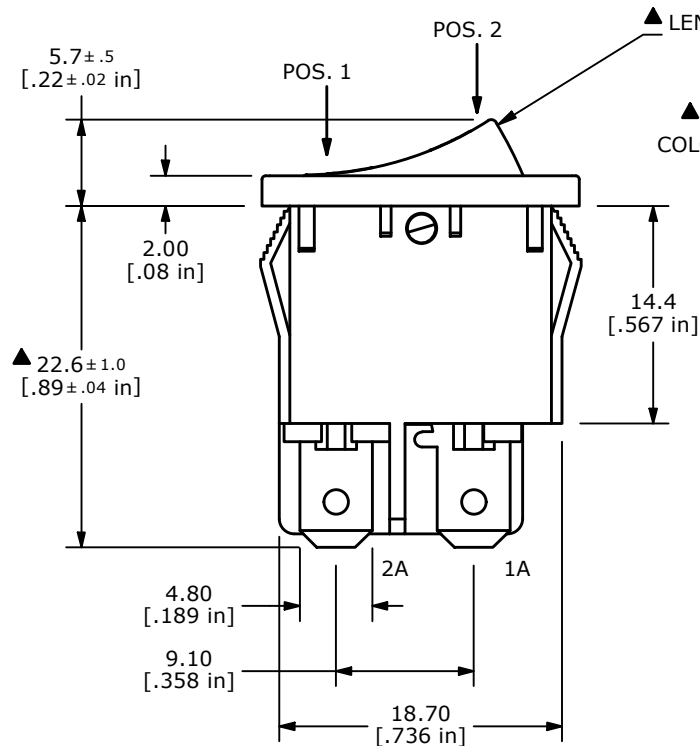
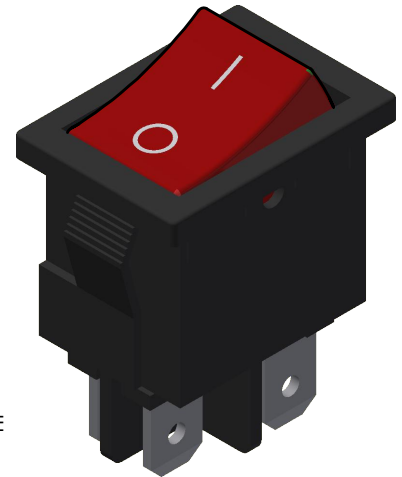
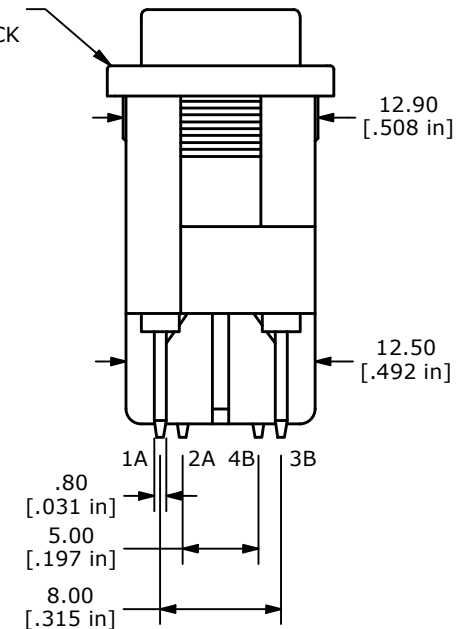
PANEL THICKNESS	X
0.75 - 1.25	19.2
1.25 - 2.00	19.4
2.00 - 3.00	19.6

CIRCUIT: DPST
OFF - ON

NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. CONTACT RATINGS: 16A @ 125VAC [UR, cUR]
10A @ 250VAC [UR, cUR]
1/3HP 125/250VAC [UR, cUR]
6. CONTACT RESISTANCE: 35m Ω MAX. @ 50VAC
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VAC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]
10. OPERATING TEMPERATURE: -20°C TO 105°C [UR, cUR]
11. ▲ DENOTES CRITICAL PARAMETER
12. LAMP VOLTAGE: 250V

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1A-2A, 3B-4B

▲ GRAPHIC
COLOR: WHITE▲ LENS COLOR:
RED▲ BODY
COLOR: BLACK

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102882	RELEASE	07/31/24	JS	TITLE RA812C1021-117				100127916
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	7/24/2024	JS	38-RA812C1021117	A