


PANEL CUTOUT

PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.4
2.00 - 3.00	30.7

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
NONE	2-1



▲ CIRCUIT: SPST

NOTE:

1. DIMENSIONS IN MM [INCH]

2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25

3. TERMINAL NUMBERS FOR REF ONLY

▲ 4. CONTACT MATERIAL: SILVER

▲ 5. CONTACT RATINGS:

ANSI/UL 61058-1

20A @ 125VAC T105 [cURus]

3/4HP T105 [cURus]

6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC INITIAL

7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC





8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE

9. ELECTRICAL LIFE: 10,000 CYCLES [cURus]

10. OPERATING TEMPERATURE: -20°C to 105°C [cURus]

▲ 11. ILLUMINATION VOLTAGE: 12V LED

12. ▲ DENOTES CRITICAL PARAMETER

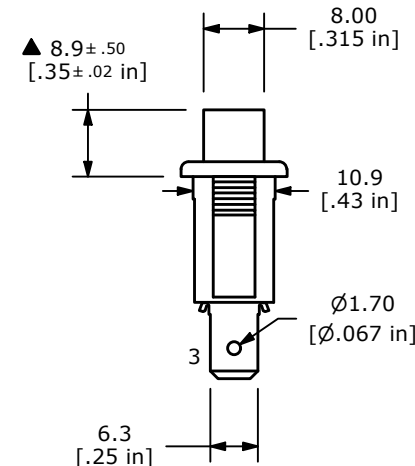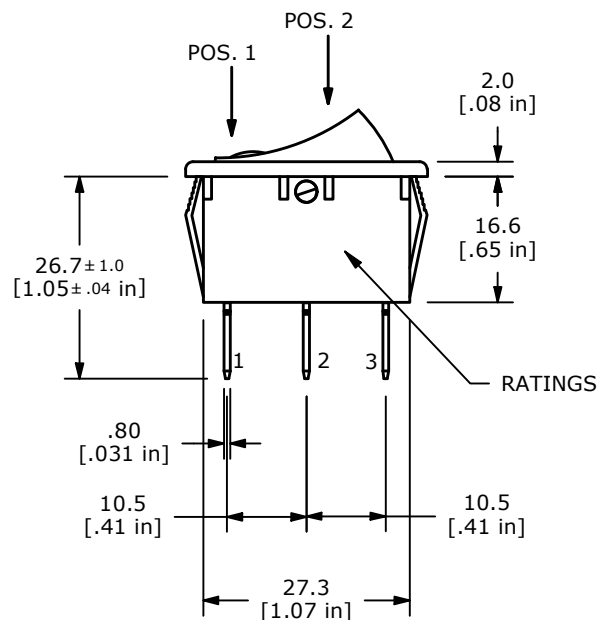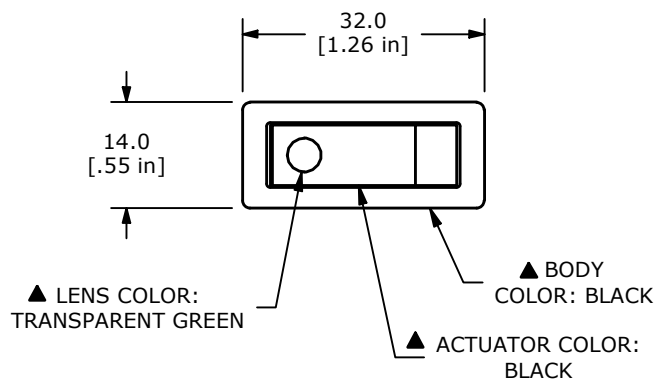

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
H	ECO-102885	NOTE 5 20A WAS 15, NOTE 10 105C WAS 85	07/30/24	JS	TITLE RB141C1100-234				000001462
					SCALE	DATE	DR	DWG	REV
					1:1	5/3/2011	MW	38-RB141C1100234	H

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED