


PANEL CUTOUT





PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.2
2.00 - 3.00	30.5

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
NONE	1-2



NOTE:

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- CONTACT RATINGS:
ANSI/UL 1054
16A 125/250VAC [cURus]
20A 125VAC [cURus]
3/4HP 125/250VAC [cURus]
- CONTACT RESISTANCE: 20mΩ MAX.
- INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
- DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 6,000 CYCLES [cURus]
- MAX OPERATING TEMPERATURE: +65°C [cURus]
- ILLUMINATION VOLTAGE: 12V
- ▲ DENOTES CRITICAL PARAMETER

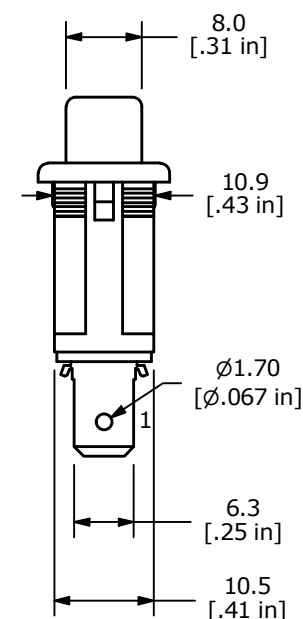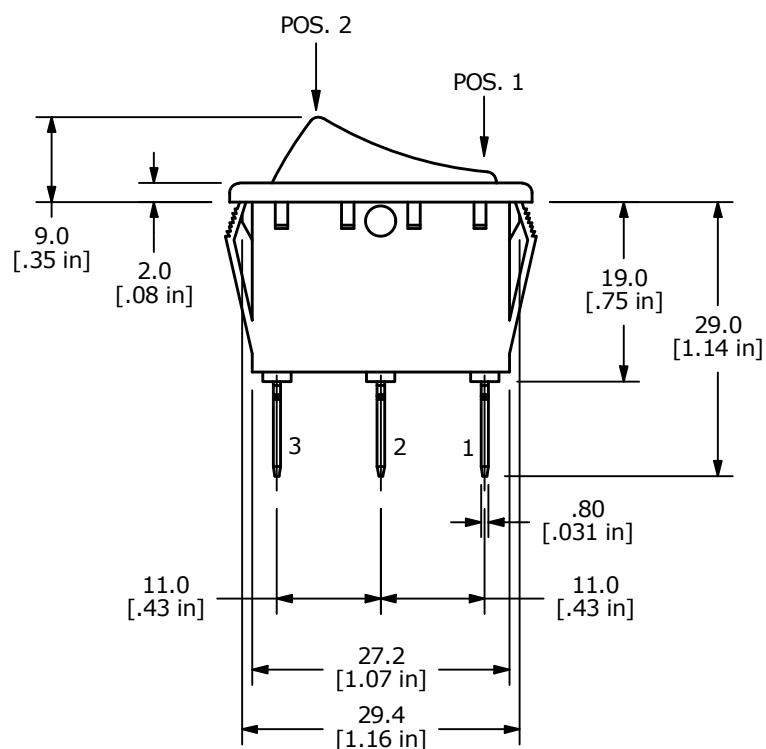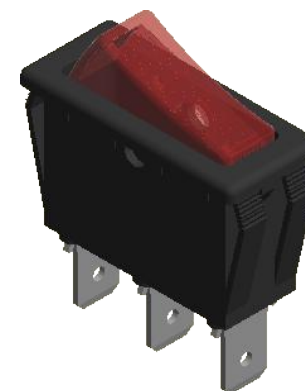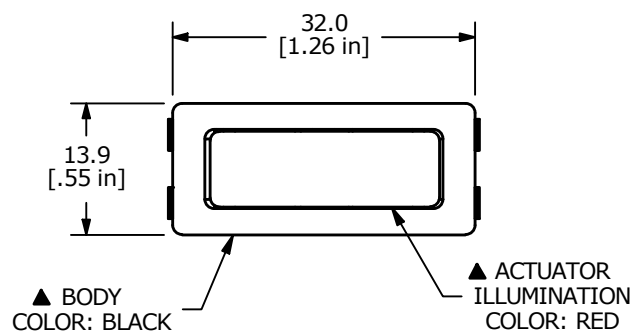

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-101201	UPDATE PRINT	12/19/22	JS	TITLE RB141D1000-114				000000274
					SCALE	DATE	DR	DWG	REV
					1:1	10/3/2004	CAB	14-RB141D1000114	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED