

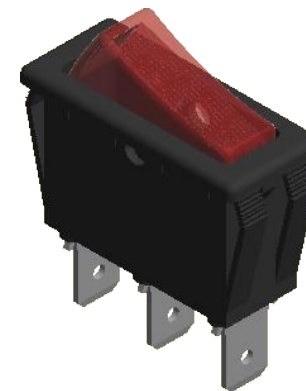
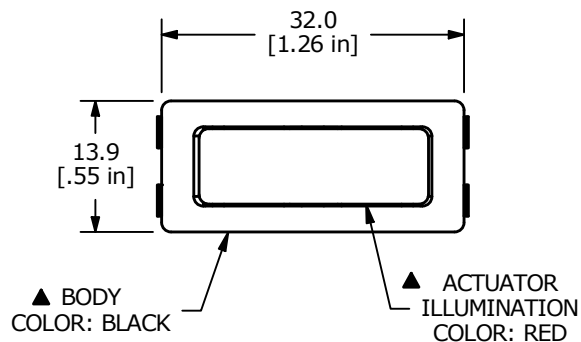
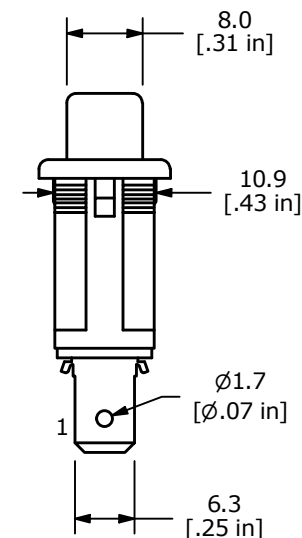


PANEL CUTOUT

PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.2
2.00 - 3.00	30.5

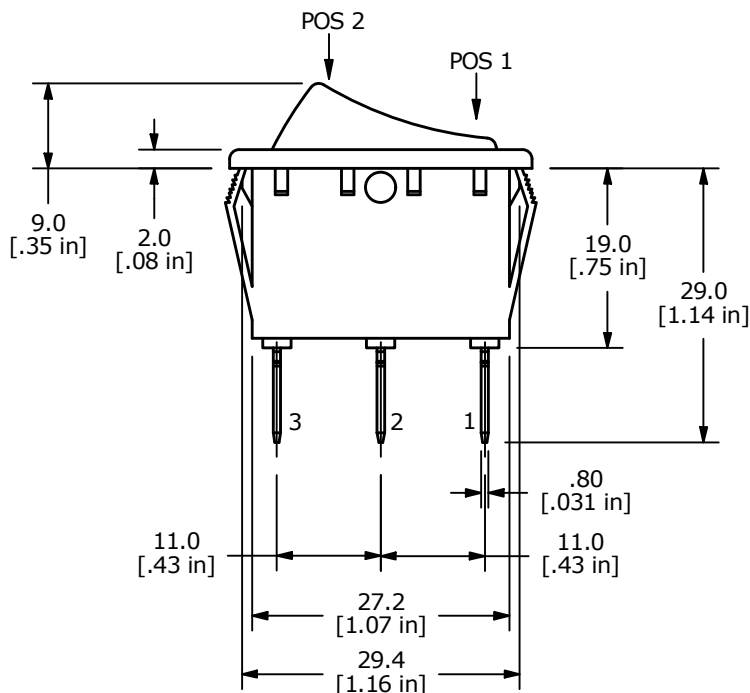

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
NONE	2-1



NOTE:

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- CONTACT RATINGS:
ANSI/UL 1054
16A @ 125/250VAC [cURus]
20A @ 125VAC [cURus]
3/4HP 125/250VAC [cURus]
- CONTACT RESISTANCE: 20m Ω MAX. INITIAL
- INSULATION RESISTANCE: 100M Ω MIN. @ 500VDC
- DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 6,000 CYCLES [cURus]
- OPERATING TEMPERATURE: +65°C [cURus]
- ILLUMINATION VOLTAGE: 125V
- ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101201	UPDATE PRINT	12/19/22	JS	TITLE RB141D1000-116				000000275
					SCALE 1:1	DATE 6/26/2009	DR CAB	DWG 14-RB141D1000116	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED