

PANEL CUTOUT

PANEL THICKNESS	(X)
0.75 - 1.25	30.0
1.25 - 2.00	30.4
2.00 - 3.00	30.7




SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
NONE	2-1



▲ CIRCUIT: SPST

NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
- ▲ 5. CONTACT RATINGS:
ANSI/UL 1054
16A @ 125/250VAC [cURus]
20A @ 125VAC [cURus]
3/4HP 125/250 VAC [cxURus]
6. CONTACT RESISTANCE: 20m Ω MAX. @ 50VAC INITIAL
7. INSULATION RESISTANCE: 100M Ω MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [cURus]
10. OPERATING TEMPERATURE: +65°C [cURus]
- ▲ 11. ILLUMINATION VOLTAGE: NON-ILLUMINATED
12. ▲ DENOTES CRITICAL PARAMETER

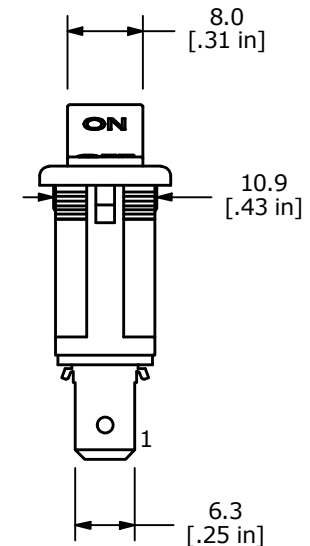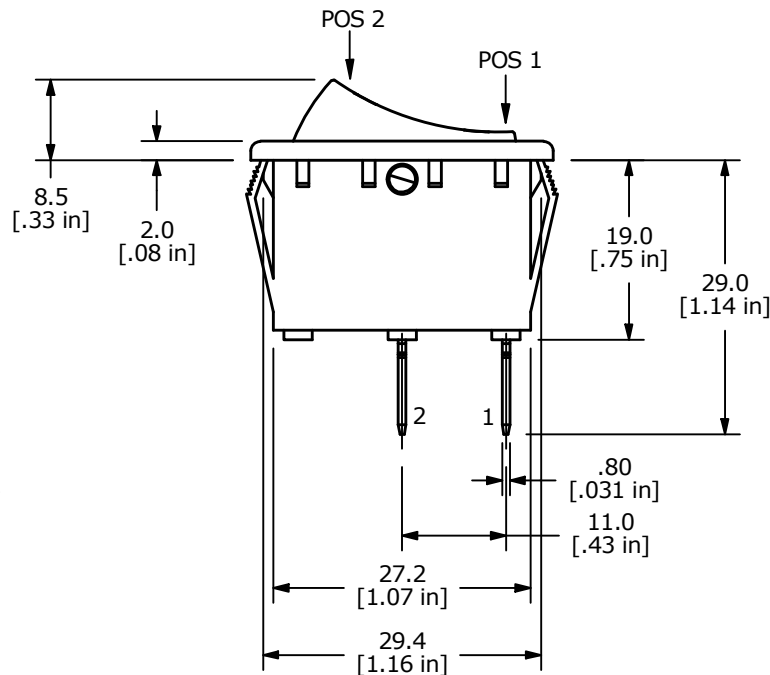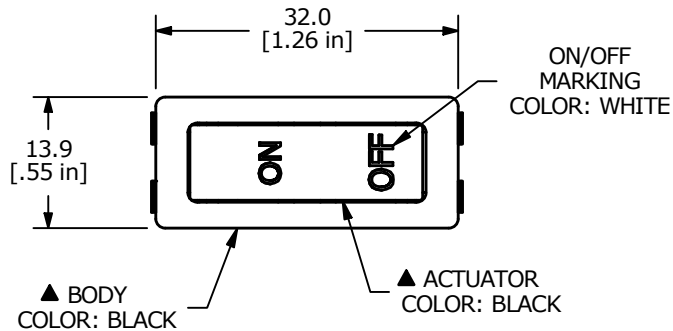

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101201	UPDATE PRINT	12/19/22	JS	TITLE RB141D1123				000000283
					SCALE 1:1	DATE 10/21/2010	DR CAB	DWG 14-RB141D1123	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED