
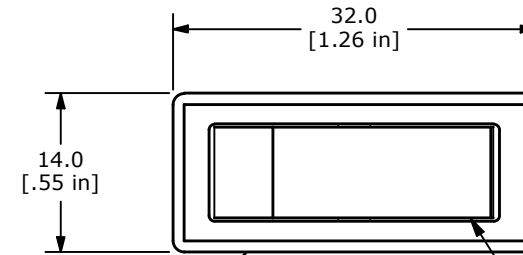
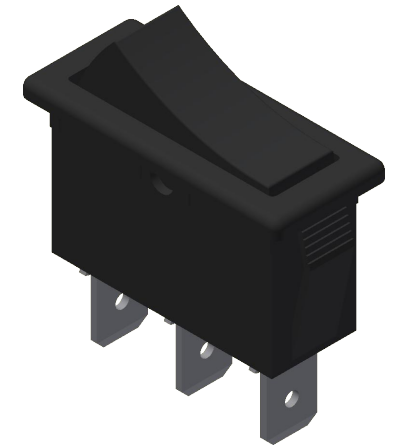


PANEL CUTOUT

PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.4
2.00 - 3.00	30.7



▲ BODY
COLOR: BLACK▲ ACTUATOR
COLOR: BLACK

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
2-3	2-1



NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
- ▲ 5. CONTACT RATINGS: ANSI/UL 61058-1
20A @ 125VAC T105 [cURUS]
3/4HP T105 [cURUS]
6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC INITIAL
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 10,000 CYCLES [cURUS]
10. OPERATING TEMPERATURE: -20°C to 105°C [cURUS]
- ▲ 11. ILLUMINATION VOLTAGE: NON-ILLUMINATED
12. ▲ DENOTES CRITICAL PARAMETER

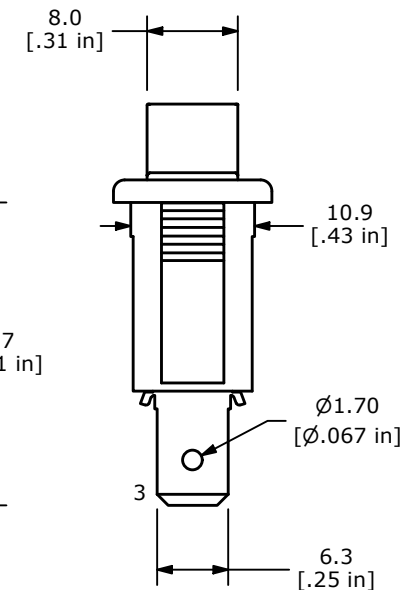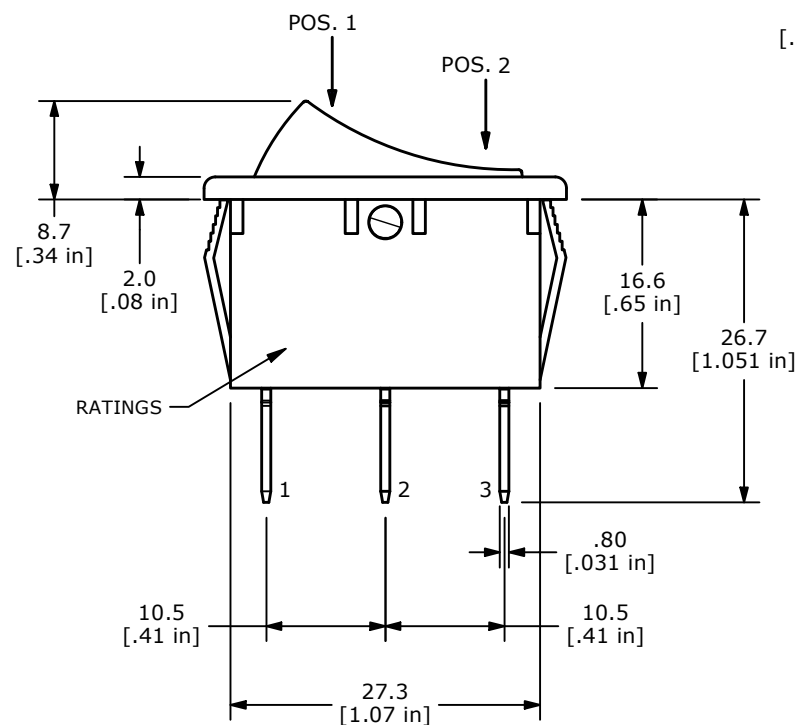

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
E	ECO-102881	NOTE 5 20A WAS 15A NOTE 10 105C WAS 85C	07/30/24	JS	TITLE RB143C1100				000001463
					SCALE	DATE	DR	DWG	REV
					3:2	10/10/2010	CAB	38-RB143C1100	E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED